





Center Frequency[Fo]	390MHz
Operating Frequency	385~395MHz
Insertion Loss	2.0dB max.
Passband VSWR	1.3 max.
Stopband Attenuation	90dB min@DC~370MHz
	90dB min@410~420MHz
Impedance	50 Ohms
Power	25W
RF Connector	SMA female
Surface Finish	Black Paint
Operatinge Temperature	-30℃~+70℃
Net Wight	1095a

Product Features

- 390 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available.
 Please consult the factory.

Performance Chart

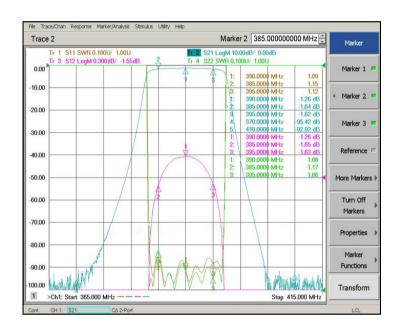

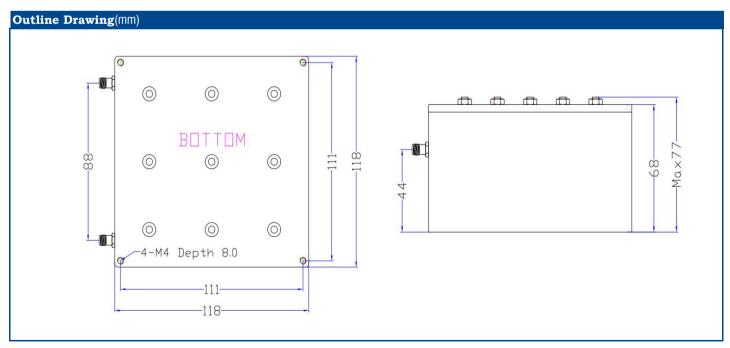

Outline Tolerances ±0.5mm (0.02inch)