


TMPD2-00300050-300N

**300 to 500 MHz, 300W, N Female
 2-WAY POWER DIVIDER**

Electrical Characteristics

FREQUENCY RANGE	300~500MHz
INSERTION LOSS	0.3dB max.
(excluding theoretical insertion loss 3.0dB)		
AMPLITUDE BALANCE	±0.2dB
PHASE BALANCE	±2 Deg.
VSWR(input port)	1.12 typ. & 1.2 max.
VSWR(output ports)	1.1 typ. & 1.2 max.
ISOLATION	26dB typ. & 20dB min.
IMPEDANCE	50 Ohms
POWER RATING(as a divider)	300W
POWER RATING(as a combiner)	50W

Outline Drawing(mm[inch])

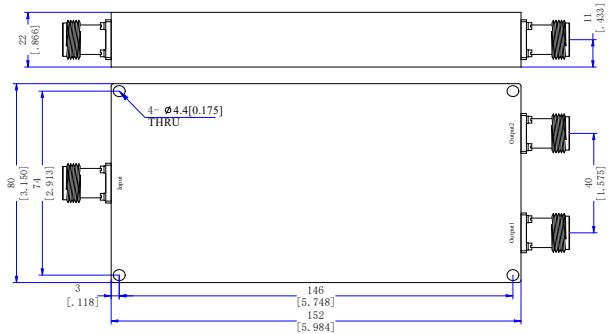

Mechanical and Environmental Characteristics

Dimensions	152×80×22mm
RF Connectors	N female
Surface Finishing	Black Paint
Operating Temperature	-35℃ ~ +75℃
Weight	530g