


## TMPD2-00300200-30S

**300 to 2000 MHz, 30W, SMA Female  
 2-WAY POWER DIVIDER**

### Electrical Characteristics

<b>FREQUENCY RANGE</b>	.....	300~2000MHz
<b>INSERTION LOSS</b>	.....	1.0dB max.
(excluding theoretical insertion loss 3.0dB)		
<b>AMPLITUDE BALANCE</b>	.....	±0.2dB
<b>PHASE BALANCE</b>	.....	±3 Deg.
<b>VSWR(input port)</b>	.....	1.15 typ. & 1.25 max.
<b>VSWR(output ports)</b>	.....	1.11 typ. & 1.2 max.
<b>ISOLATION</b>	.....	28dB typ. & 20dB min.
<b>IMPEDANCE</b>	.....	50 Ohms
<b>POWER RATING(as a divider)</b>	.....	30W
<b>POWER RATING(as a combiner)</b>	.....	2W

### Outline Drawing(mm[inch])

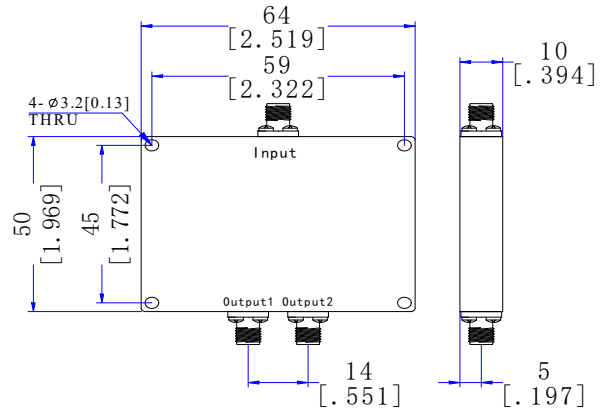

### Mechanical and Enviromental Characteristics

<b>Dimensions</b>	.....	50×64×10mm
<b>RF Connectors</b>	.....	SMA female
<b>Surface Finishing</b>	.....	Gray Paint
<b>Operating Temperature</b>	.....	-45°C ~ +85°C
<b>Weight</b>	.....	75g