


TMPD2-00400100-200N

400 to 1000 MHz, 200W, N Female
2-WAY POWER DIVIDER

Electrical Characteristics

FREQUENCY RANGE	400~1000MHz
INSERTION LOSS	0.4dB max.
(excluding theoretical insertion loss 3.0dB)	
AMPLITUDE BALANCE	±0.2dB
PHASE BALANCE	±2 Deg.
VSWR(input port)	1.18 typ. & 1.25 max.
VSWR(output ports)	1.12 typ. & 1.2 max.
ISOLATION	18dB min.
IMPEDANCE	50 Ohms
POWER RATING(as a divider)	200W
POWER RATING(as a combiner)	20W

Outline Drawing(mm[inch])

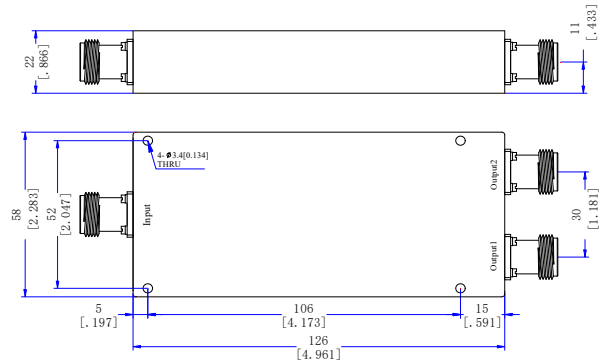

Mechanical and Environmental Characteristics

Dimensions	126×58×22mm
RF Connectors	N female
Surface Finishing	Sandblasted Silver
Operating Temperature	-35℃~+75℃
Weight	350g