


TMPD2-00700270-20P

0.7 to 2.7 GHz, 20W, SMP Female
2-WAY POWER DIVIDER

Electrical Characteristics

FREQUENCY RANGE	700~2700MHz
INSERTION LOSS	0.5dB max.
(excluding theoretical insertion loss 3.0dB)		
AMPLITUDE BALANCE	±0.2dB
PHASE BALANCE	±3 Deg.
VSWR(input port)	1.16 typ. & 1.25 max.
VSWR(output ports)	1.14 typ. & 1.2 max.
ISOLATION	25dB typ. & 20dB min.
IMPEDANCE	50 Ohms
POWER RATING(as a divider)	20W
POWER RATING(as a combiner)	1W

Outline Drawing(mm[inch])

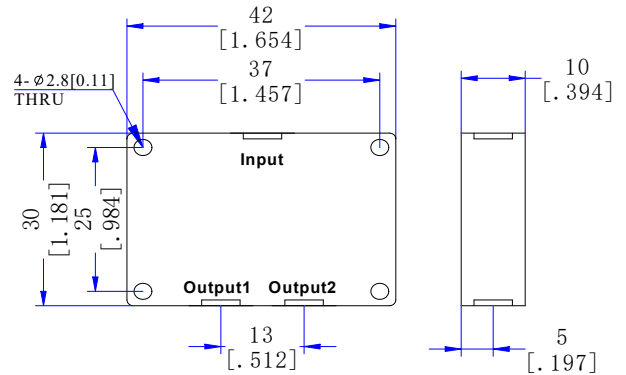

Mechanical and Enviromental Characteristics

Dimensions	30×42×10mm
RF Connectors	SMP female
Surface Finishing	Black Paint
Operating Temperature	-45°C ~ +85°C
Weight	45g