


TMPD2-00900400-30SA

**0.9 to 4 GHz, 30W, SMA Female
 2-WAY POWER DIVIDER**

Electrical Characteristics

FREQUENCY RANGE	900~4000MHz
INSERTION LOSS	0.6dB max.
(excluding theoretical insertion loss 3.0dB)		
AMPLITUDE BALANCE	±0.2dB
PHASE BALANCE	±3 Deg.
VSWR(input port)	1.15 typ. & 1.25 max.
VSWR(output ports)	1.12 typ. & 1.2 max.
ISOLATION	26dB typ. & 20dB min.
IMPEDANCE	50 Ohms
POWER RATING(as a divider)	30W
POWER RATING(as a combiner)	2W
Power Supply48Vdc/1A

Outline Drawing(mm[inch])

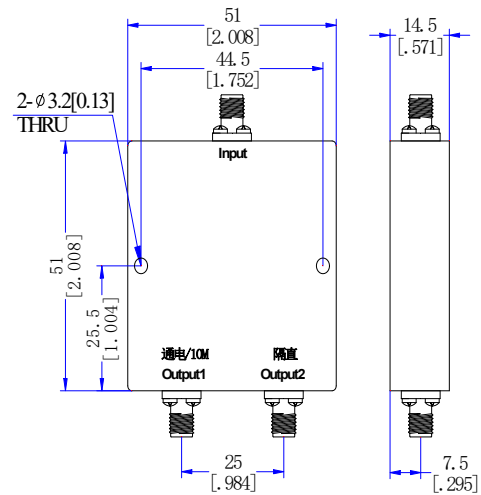

Mechanical and Environmental

Dimensions	51×51×14.5mm
RF Connectors	SMA female
Surface Finishing	Silver Paint
Operating Temperature	-45°C ~ +85°C