


## TMPD2-01001800-20S

**1 to 18 GHz, 20W, SMA Female  
 2-WAY POWER DIVIDER**

### Electrical Characteristics

<b>FREQUENCY RANGE</b>	.....	1000~18000MHz
<b>INSERTION LOSS</b>	.....	1.2dB max.
(excluding theoretical insertion loss 3.0dB)		
<b>AMPLITUDE BALANCE</b>	.....	±0.3dB
<b>PHASE BALANCE</b>	.....	±3 Deg.
<b>VSWR(input port)</b>	.....	1.19 typ. & 1.4 max.
<b>VSWR(output ports)</b>	.....	1.12 typ. & 1.3 max.
<b>ISOLATION</b>	.....	26dB typ. & 18dB min.
<b>IMPEDANCE</b>	.....	50 Ohms
<b>POWER RATING(as a divider)</b>	...	20W
<b>POWER RATING(as a combiner)</b>	...	1W

### Outline Drawing(mm[inch])

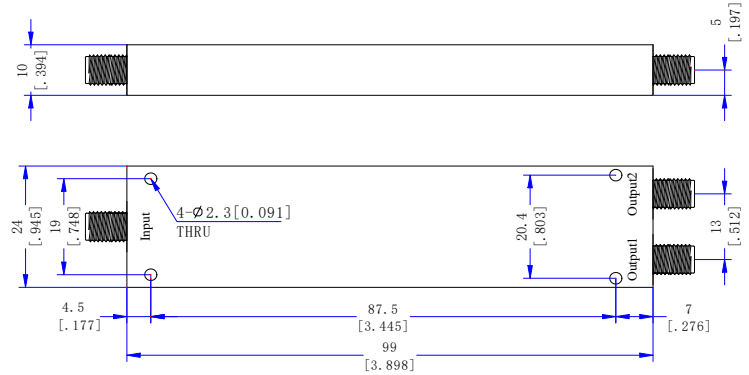

### Mechanical and Environmental Characteristics

<b>Dimensions</b>	.....	99×24×10mm
<b>RF Connectors</b>	.....	SMA female
<b>Surface Finishing</b>	.....	Black Paint
<b>Operating Temperature</b>	.....	-45°C ~ +85°C
<b>Weight</b>	.....	65g