


TMPD2-01100160-30NA

1.1 to 1.6 GHz, 30W, N Female
2-WAY POWER DIVIDER

Electrical Characteristics

FREQUENCY RANGE	1100~1600MHz
INSERTION LOSS	0.4dB max.
(excluding theoretical insertion loss 3.0dB)		
AMPLITUDE BALANCE	±0.2dB
PHASE BALANCE	±2 Deg.
VSWR(input port)	1.16 typ. & 1.2 max.
VSWR(output ports)	1.12 typ. & 1.2 max.
ISOLATION	28dB typ. & 22dB min.
IMPEDANCE	50 Ohms
POWER RATING(as a divider)	30W
POWER RATING(as a combiner)	2W
POWER SUPPLY	24Vdc/3A
IP GRAGE	IP67

Outline Drawing(mm[inch])

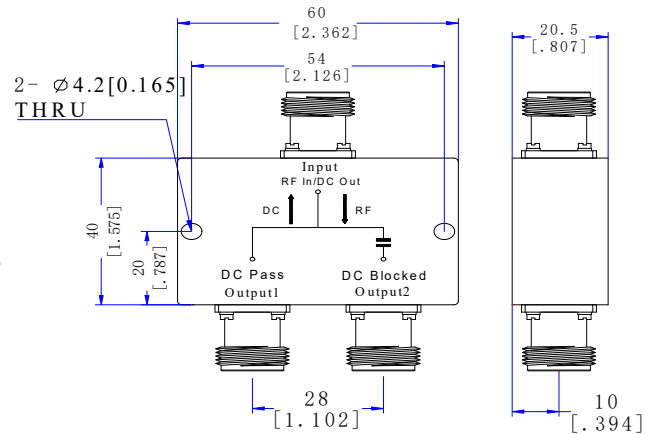

Mechanical and Environmental Characteristics

Dimensions	40×60×20.5mm
RF Connectors	N female
Surface Finishing	Black Paint
Operating Temperature	-45°C ~ +85°C