


TMPD2-01700350-30S

1.7 to 3.5 GHz, 30W, SMA Female
2-WAY POWER DIVIDER

Electrical Characteristics

FREQUENCY RANGE	1700~3500MHz
INSERTION LOSS	0.5dB max.
(excluding theoretical insertion loss 3.0dB)		
AMPLITUDE BALANCE	±0.3dB
PHASE BALANCE	±3 Deg.
VSWR(input port)	1.16 typ. & 1.25 max.
VSWR(output ports)	1.14 typ. & 1.2 max.
ISOLATION	25dB typ. & 20dB min.
IMPEDANCE	50 Ohms
POWER RATING(as a divider)	30W
POWER RATING(as a combiner)	2W

Outline Drawing(mm[inch])

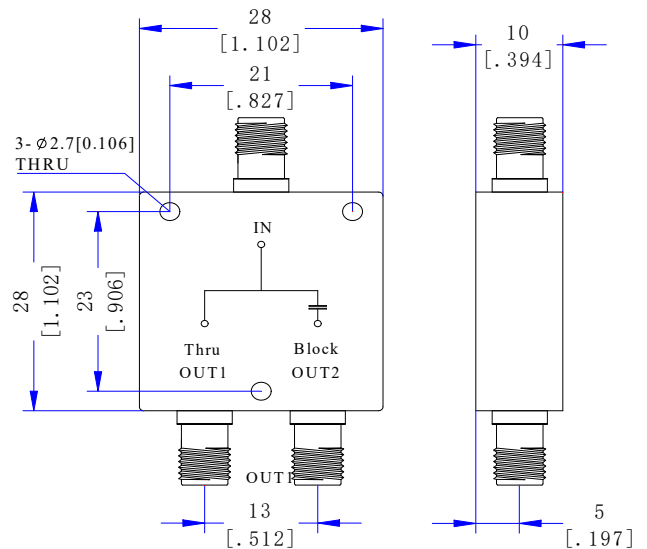

Mechanical and Environmental Characteristics

Dimensions	28×28×10mm
RF Connectors	SMA female
Surface Finishing	Black Paint
Operating Temperature	-45°C ~ +85°C
Weight	21g