


TMPD2-01700600-30SA

1.7 to 6 GHz, 30W, SMA Female
2-WAY POWER DIVIDER

Electrical Characteristics

FREQUENCY RANGE	1700~6000MHz
INSERTION LOSS	0.6dB max.
(excluding theoretical insertion loss 3.0dB)		
AMPLITUDE BALANCE	±0.2dB
PHASE BALANCE	±2 Deg.
VSWR(input port)	1.16 typ. & 1.25 max.
VSWR(output ports)	1.14 typ. & 1.2 max.
ISOLATION	28dB typ. & 20dB min.
IMPEDANCE	50 Ohms
POWER RATING(as a divider)	30W
POWER RATING(as a combiner)	2W

Outline Drawing(mm[inch])

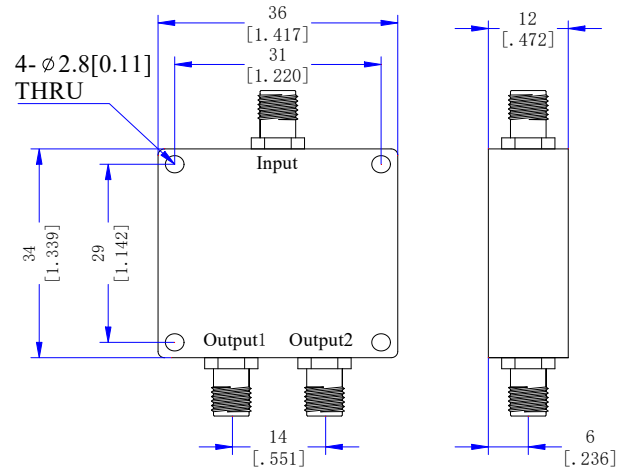

Mechanical and Environmental Characteristics

Dimensions	34×36×12mm
RF Connectors	SMA female
Surface Finishing	Sandblasted Silver
Operating Temperature	-35°C ~ +75°C
Weight	35g