


TMPD2-02700290-30N

2.7 to 2.9 GHz, 30W, N Female
2-WAY POWER DIVIDER

Electrical Characteristics

FREQUENCY RANGE	2700~2900MHz
INSERTION LOSS	0.5dB max.
(excluding theoretical insertion loss 3.0dB)		
AMPLITUDE BALANCE	±0.2dB
PHASE BALANCE	±2 Deg.
VSWR(input port)	1.18 typ. & 1.25 max.
VSWR(output ports)	1.12 typ. & 1.2 max.
ISOLATION	28dB typ. & 20dB min.
IMPEDANCE	50 Ohms
POWER RATING(as a divider)	30W
POWER RATING(as a combiner)	2W

Outline Drawing(mm[inch])

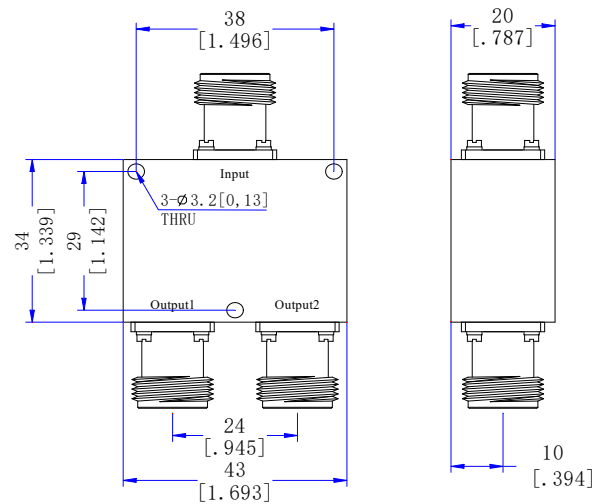

Mechanical and Environmental Characteristics

Dimensions	34×38×20mm
RF Connectors	N female
Surface Finishing	Sandblasted Silver
Operating Temperature	-35°C ~ +75°C
Weight	65g