


TMPD2-30503250-20K

30.5 to 32.5 GHz, 20W, 2.92mm Female
2-WAY POWER DIVIDER

Electrical Characteristics

FREQUENCY RANGE	30.5~32.5GHz
INSERTION LOSS	0.7dB max.
(excluding theoretical insertion loss 3.0dB)	
AMPLITUDE BALANCE	±0.3dB
PHASE BALANCE	±4 Deg.
VSWR(input port)	1.22 typ. & 1.5 max.
VSWR(output ports)	1.22 typ. & 1.5 max.
ISOLATION	24dB typ. & 18dB min.
IMPEDANCE	50 Ohms
POWER RATING(as a divider)	20W
POWER RATING(as a combiner)	1W

Outline Drawing(mm[inch])

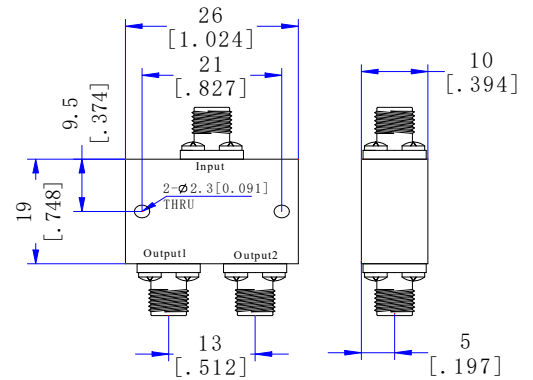

Mechanical and Environmental Characteristics

Dimensions	19×26×10mm
RF Connectors	2.92mm female
Surface Finishing	Black Paint
Operating Temperature	-45°C ~ +85°C
Weight	21g