


## TMPD3-0000600-2S

**DC to 6 GHz, 2W, SMA Female  
3-WAY POWER DIVIDER**

### Electrical Characteristics

<b>FREQUENCY RANGE</b>	DC~6000MHz
<b>INSERTION LOSS</b>	10.8dB max.
<b>AMPLITUDE BALANCE</b>	±0.4dB
<b>PHASE BALANCE</b>	±4 Deg.
<b>VSWR(input port)</b>	1.14 typ. & 1.25 max.
<b>VSWR(output ports)</b>	1.14 typ. & 1.25 max.
<b>ISOLATION</b>	8.9dB min.
<b>IMPEDANCE</b>	50 Ohms
<b>POWER RATING</b>	2W

### Outline Drawing(mm[inch])

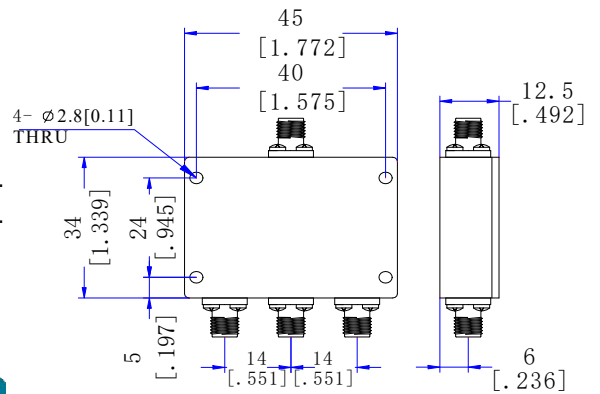

### Mechanical and Environmental Characteristics

<b>Dimensions</b>	34×45×12.5mm
<b>RF Connectors</b>	SMA female
<b>Surface Finishing</b>	Black Paint
<b>Operating Temperature</b>	-35°C~+75°C
<b>Weight</b>	55g