


TMPD4-20M30M-1B

**20 to 30 MHz, 1W, BNC Female
 4-WAY POWER DIVIDER**

Electrical Characteristics

FREQUENCY RANGE	20~30MHz
INSERTION LOSS	1.0dB max.
(excluding theoretical insertion loss 6.0dB)	
AMPLITUDE BALANCE	±0.3dB
PHASE BALANCE	±3 Deg.
VSWR(input port)	1.16 typ. & 1.2 max.
VSWR(output ports)	1.15 typ. & 1.2 max.
ISOLATION	26dB typ. & 20dB min.
IMPEDANCE	50 Ohms
POWER RATING(as a divider)	1W
POWER RATING(as a combiner)	0.5W

Outline Drawing(mm[inch])

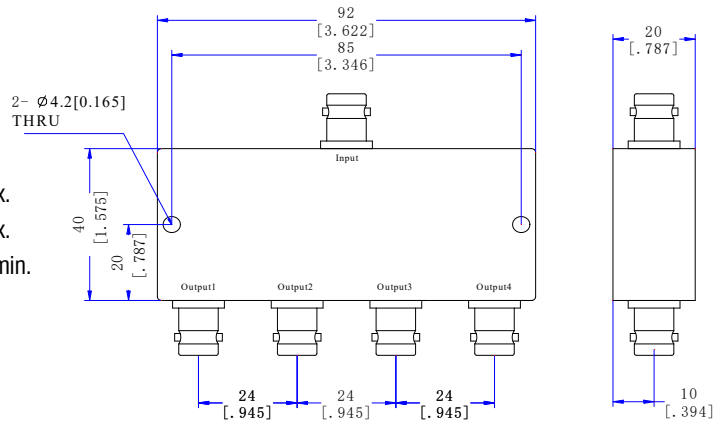

Mechanical and Environmental Characteristics

Dimensions	40×92×20mm
RF Connectors	BNC female
Surface Finishing	Sandblasted Silver
Operating Temperature	-35℃~+75℃
Weight	300g