


**TMPD4-0000300-2N**

**DC to 3 GHz, 2W, N Female  
 4-WAY POWER DIVIDER**

**Electrical Characteristics**

<b>FREQUENCY RANGE</b>	..... DC~3000MHz
<b>INSERTION LOSS</b>	..... 14.0dB max.
<b>AMPLITUDE BALANCE</b>	..... ±0.4dB
<b>PHASE BALANCE</b>	..... ±4 Deg.
<b>VSWR(input port)</b>	..... 1.11 typ. & 1.2 max.
<b>VSWR(output ports)</b>	..... 1.1 typ. & 1.2 max.
<b>ISOLATION</b>	..... 11.5dB min.
<b>IMPEDANCE</b>	..... 50 Ohms
<b>POWER RATING</b>	..... 2W

**Outline Drawing(mm[inch])**

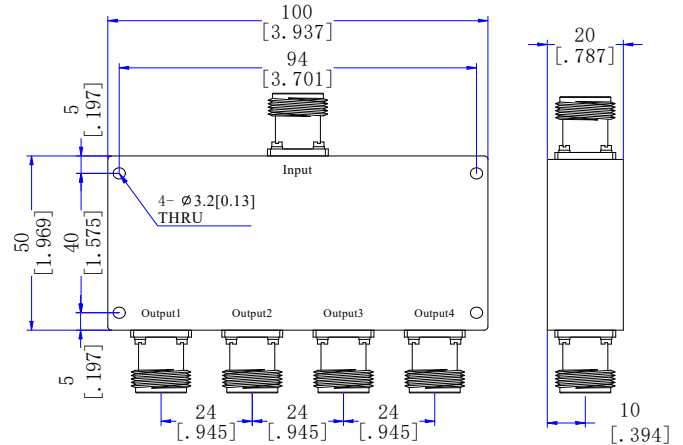

**Mechanical and Environmental Characteristics**

<b>Dimensions</b>	..... 50×100×20mm
<b>RF Connectors</b>	..... N female
<b>Surface Finishing</b>	..... Sandblasted Silver
<b>Operating Temperature</b>	..... -35℃~+75℃
<b>Weight</b>	..... 310g