


**TMPD4-0000600-2S**

**DC to 6 GHz, 2W, SMA Female  
 4-WAY POWER DIVIDER**

**Electrical Characteristics**

<b>FREQUENCY RANGE</b>	.....	DC~6000MHz
<b>INSERTION LOSS</b>	.....	14.0dB max.
<b>AMPLITUDE BALANCE</b>	.....	±0.4dB
<b>PHASE BALANCE</b>	.....	±4 Deg.
<b>VSWR(input port)</b>	.....	1.11 typ. & 1.25 max.
<b>VSWR(output ports)</b>	.....	1.11 typ. & 1.25 max.
<b>ISOLATION</b>	.....	11.6dB min.
<b>IMPEDANCE</b>	.....	50 Ohms
<b>POWER RATING</b>	.....	2W

**Outline Drawing(mm[inch])**

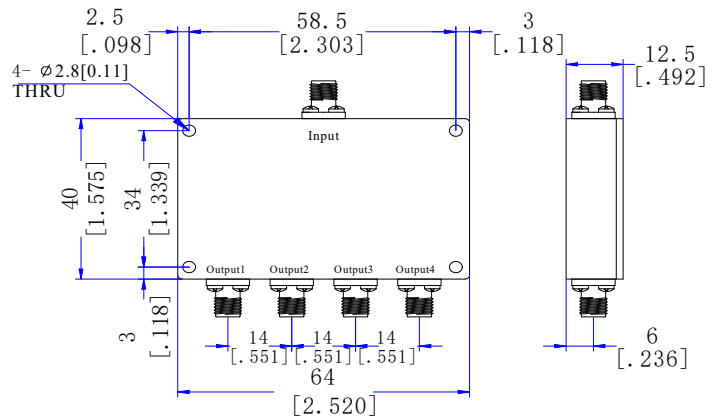

**Mechanical and Environmental Characteristics**

<b>Dimensions</b>	.....	40×64×12.5mm
<b>RF Connectors</b>	.....	SMA female
<b>Surface Finishing</b>	.....	Sandblasted Silver
<b>Operating Temperature</b>	.....	-35℃~+75℃
<b>Weight</b>	.....	85g