


TMPD4-0000600-2SA

**DC to 6 GHz, 2W, SMA Female
4-WAY POWER DIVIDER**

Electrical Characteristics

FREQUENCY RANGE	DC~6000MHz
INSERTION LOSS	14.0dB max.
AMPLITUDE BALANCE	±0.4dB
PHASE BALANCE	±4 Deg.
VSWR(input port)	1.15 typ. & 1.4 max.
VSWR(output ports)	1.15 typ. & 1.4 max.
ISOLATION	11dB min.
IMPEDANCE	50 Ohms
POWER RATING	2W

Outline Drawing(mm[inch])

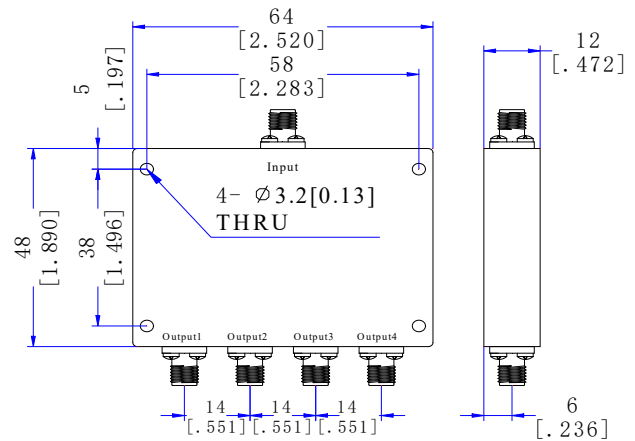

Mechanical and Environmental Characteristics

Dimensions	48×64×12mm
RF Connectors	SMA female
Surface Finishing	Black Paint
Operating Temperature	-45℃~+85℃
Weight	65g