


## TMPD4-0000600-2SB

DC to 6 GHz, 2W, SMA Female  
4-WAY POWER DIVIDER

### Electrical Characteristics

<b>FREQUENCY RANGE</b>	.....	DC~6000MHz
<b>INSERTION LOSS</b>	.....	14.5dB max.
<b>AMPLITUDE BALANCE</b>	.....	±0.4dB
<b>PHASE BALANCE</b>	.....	±4 Deg.
<b>VSWR(input port)</b>	.....	1.15 typ. & 1.3 max.
<b>VSWR(output ports)</b>	.....	1.15 typ. & 1.3 max.
<b>ISOLATION</b>	.....	11dB min.
<b>IMPEDANCE</b>	.....	50 Ohms
<b>POWER RATING</b>	.....	2W

### Outline Drawing(mm[inch])

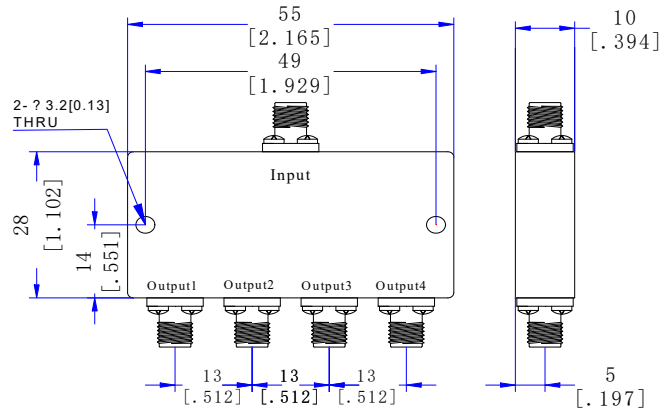

### Mechanical and Environmental Characteristics

<b>Dimensions</b>	.....	28×55×10mm
<b>RF Connectors</b>	.....	SMA female
<b>Surface Finishing</b>	.....	Black Paint
<b>Operating Temperature</b>	.....	-45℃~+85℃