


TMPD4-0000730-2S

**DC to 7.3 GHz, 2W, SMA Female
4-WAY POWER DIVIDER**

Electrical Characteristics

FREQUENCY RANGE	DC~7300MHz
INSERTION LOSS	17.0dB max.
AMPLITUDE BALANCE	±0.6dB
PHASE BALANCE	±6 Deg.
VSWR(input port)	1.11 typ. & 1.3 max.
VSWR(output ports)	1.11 typ. & 1.3 max.
ISOLATION	11.5dB min.
IMPEDANCE	50 Ohms
POWER RATING	2W

Outline Drawing(mm[inch])

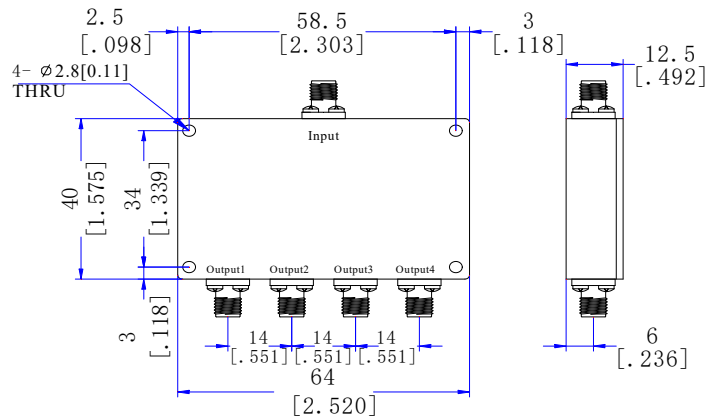

Mechanical and Environmental Characteristics

Dimensions	40×64×12.5mm
RF Connectors	SMA female
Surface Finishing	Sandblasted Silver
Operating Temperature	-35℃~+75℃
Weight	85g