


## TMPD4-00100600-20S

100 to 6000 MHz, 20W, SMA Female  
4-WAY POWER DIVIDER

### Electrical Characteristics

<b>FREQUENCY RANGE</b>	.....	100~6000MHz
<b>INSERTION LOSS</b>	.....	4.0dB max.
(excluding theoretical insertion loss 6.0dB)		
<b>AMPLITUDE BALANCE</b>	.....	±0.3dB
<b>PHASE BALANCE</b>	.....	±4 Deg.
<b>VSWR(input port)</b>	.....	≤1.5@100~220MHz
	.....	≤1.3@220~6000MHz
<b>VSWR(output ports)</b>	.....	1.16 typ. & 1.25 max.
<b>ISOLATION</b>	.....	≥10dB@100~200MHz
	.....	≥20dB@200~6000MHz
<b>IMPEDANCE</b>	.....	50 Ohms
<b>POWER RATING(as a divider)</b>	.....	20W
<b>POWER RATING(as a combiner)</b>	.....	1W

### Outline Drawing(mm[inch])

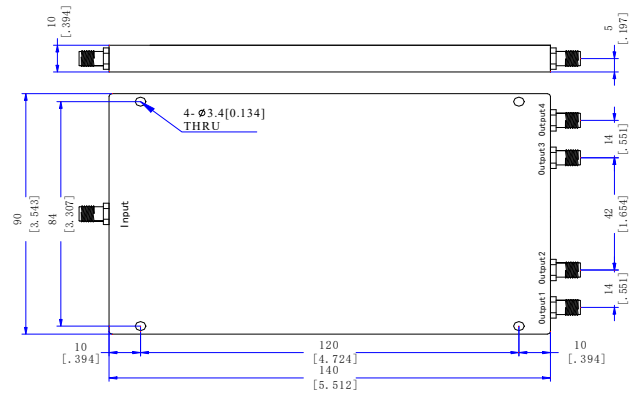

### Mechanical and Enviromental Characteristics

<b>Dimensions</b>	.....	140×90×10mm
<b>RF Connectors</b>	.....	SMA female
<b>Surface Finishing</b>	.....	Black Paint
<b>Operating Temperature</b>	.....	-45°C ~ +85°C
<b>Weight</b>	.....	280g