成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

TMPD4-00200400-30S

TMPD4-00200400-30S

200 to 4000 MHz, 30W, SMA Female
4-WAY POWER DIVIDER

Electrical Characteristics

FREQUENCY RANGE	200～4000MHz
INSERTION LOSS	2.5dB max.
(excluding theoretical insertion loss 6.0dB)	
AMPLITUDE BALANCE	±0.3dB
PHASE BALANCE	±4 Deg.
VSWR(input port)	1.18 typ. & 1.25 max.
VSWR(output ports)	1.16 typ. & 1.2 max.
ISOLATION	28dB typ. & 20dB min.
IMPEDANCE	50 Ohms
POWER RATING(as a divider)	30W
POWER RATING(as a combiner)	2W

Mechanical and Enviromental Characteristics

Dimensions	130×72×10mm
RF Connectors	SMA female
Surface Finishing	Black Paint
Operating Temperature	-45℃ ～ +85℃
Weight	210g

Outline Drawing(mm[inch])

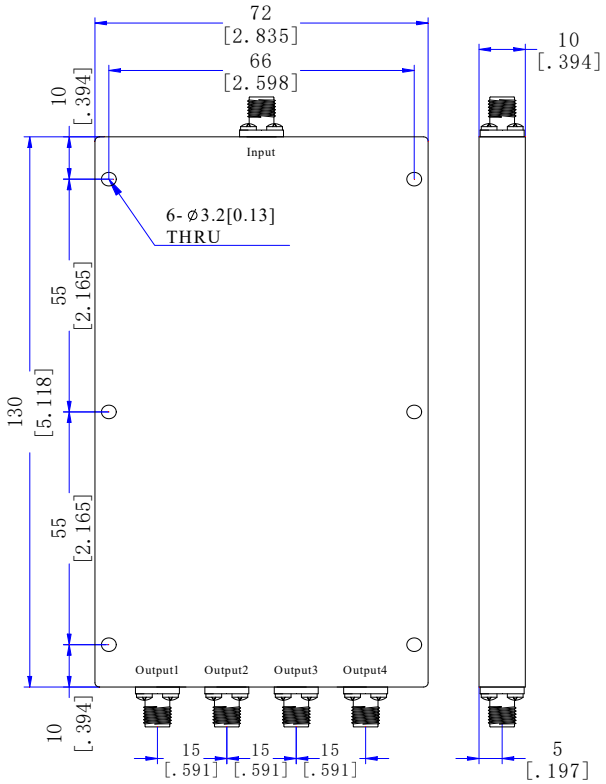

All product specifications are subject to change without notice