成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

TMPD4-00350050-250N

TMPD4-00350050-250N

350 to 500 MHz, 250W, N Female
4-WAY POWER DIVIDER

Electrical Characteristics

FREQUENCY RANGE	350～500MHz
INSERTION LOSS	0.4dB max.
(excluding theoretical insertion loss 6.0dB)	
AMPLITUDE BALANCE	±0.2dB
PHASE BALANCE	±2 Deg.
VSWR(input port)	1.16 typ. & 1.2 max.
VSWR(output ports)	1.12 typ. & 1.2 max.
ISOLATION	26dB typ. & 22dB min.
IMPEDANCE	50 Ohms
POWER RATING(as a divider)	250W
POWER RATING(as a combiner)	100W

Mechanical and Enviromental Characteristics

Dimensions	210×142×24mm
RF Connectors	N female
Surface Finishing	Black Paint
Operating Temperature	-35℃ ～ +75℃

Outline Drawing(mm[inch])

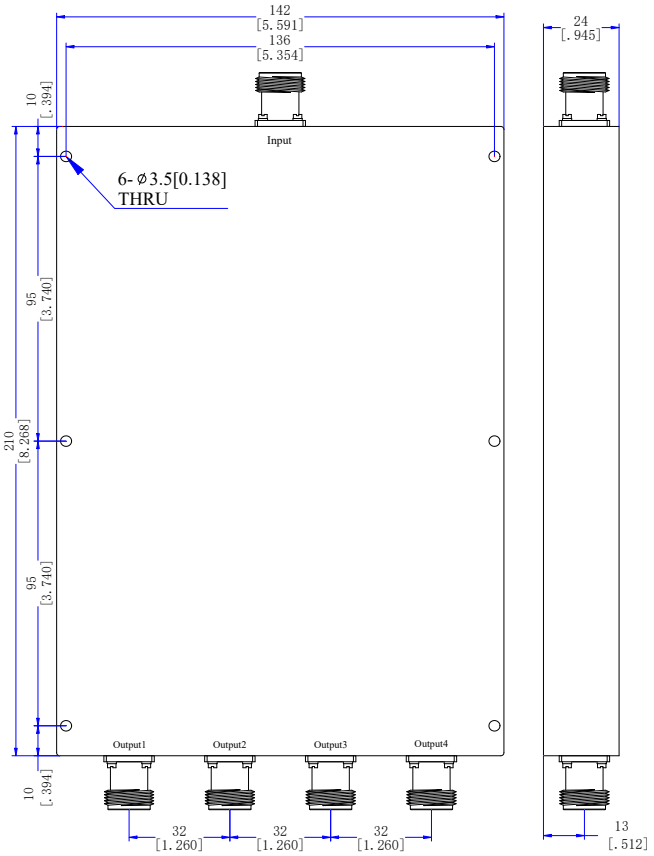

All product specifications are subject to change without notice