成都巨人微波
TITAN MICROWAVE INC.
- A Professional RF & Microwave Components Supplier -

TMPD4-00700270-30S

TMPD4-00700270-30S

0.7 to 2.7 GHz, 30W, SMA Female
4-WAY POWER DIVIDER

Electrical Characteristics

FREQUENCY RANGE . . . . . 700~2700MHz
INSERTION LOSS . . . . . 0.8dB max.
(excluding theoretical insertion loss 6.0dB)
AMPLITUDE BALANCE . . . . . ±0.3dB
PHASE BALANCE . . . . . ±4 Deg.
VSWR(input port) . . . . . 1.18 typ. & 1.25 max.
VSWR(output ports) . . . . . 1.12 typ. & 1.2 max.
ISOLATION . . . . . 26dB typ. & 18dB min.
IMPEDANCE . . . . . 50 Ohms
POWER RATING(as a divider) . . . 30W
POWER RATING(as a combiner) . . . 2W

Mechanical and Enviromental Characteristics

Dimensions . . . . . 58×58×10mm
RF Connectors . . . . . SMA female
Surface Finishing . . . . . Black Paint
Operating Temperature . . . . . -45℃ ~ +85℃

Outline Drawing(mm[inch])

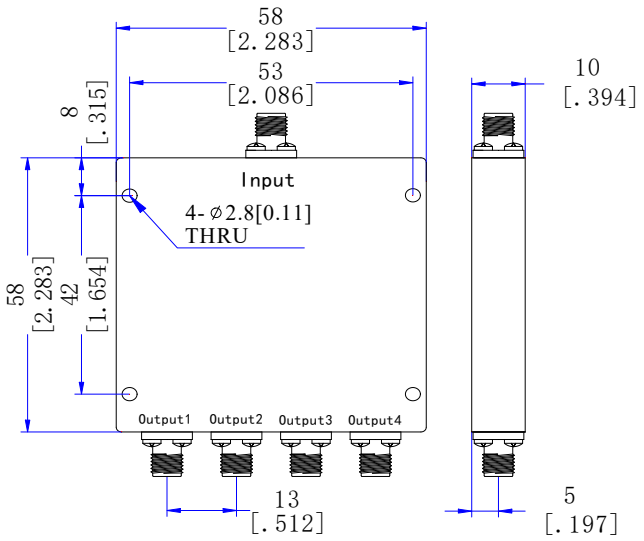

All product specifications are subject to change without notice