


TMPD4-18002000-20S

18 to 20 GHz, 20W, SMA Female
4-WAY POWER DIVIDER

Electrical Characteristics

FREQUENCY RANGE	18000~20000MHz
INSERTION LOSS	1.0dB max.
(excluding theoretical insertion loss 6.0dB)		
AMPLITUDE BALANCE	±0.4dB
PHASE BALANCE	±4 Deg.
VSWR(input port)	1.28 typ. & 1.5 max.
VSWR(output ports)	1.26 typ. & 1.5 max.
ISOLATION	22dB typ. & 18dB min.
IMPEDANCE	50 Ohms
POWER RATING(as a divider)	20W
POWER RATING(as a combiner)	1W

Outline Drawing(mm[inch])

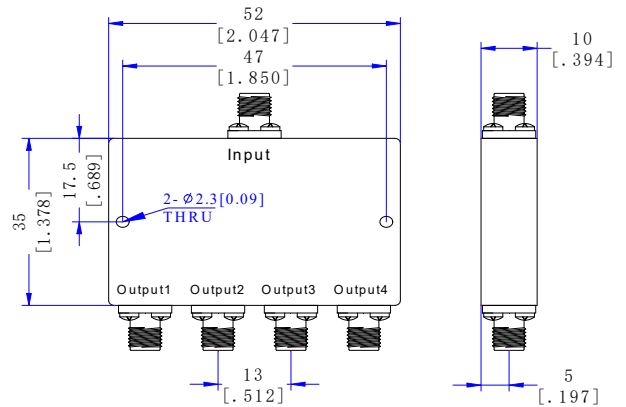

Mechanical and Environmental Characteristics

Dimensions	52×35×10mm
RF Connectors	SMA female
Surface Finishing	Black Paint
Operating Temperature	-45℃~+85℃
Weight	70g