


TMPD6-0000800-2S

DC to 8 GHz, 2W, SMA Female
6-WAY POWER DIVIDER

Electrical Characteristics

FREQUENCY RANGE	DC~8000MHz
INSERTION LOSS	20.0dB max.
AMPLITUDE BALANCE	±0.8dB
PHASE BALANCE	±9 Deg.
VSWR(input port)	1.15 typ. & 1.6 max.
VSWR(output ports)	1.15 typ. & 1.5 max.
ISOLATION	6.0dB min.
IMPEDANCE	50 Ohms
POWER RATING	2W

Outline Drawing(mm[inch])

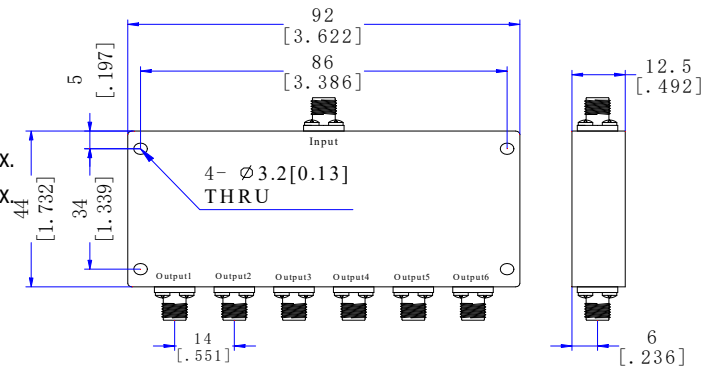

Mechanical and Environmental Characteristics

Dimensions	44×92×12.5mm
RF Connectors	SMA female
Surface Finishing	Black Paint
Operating Temperature	-35°C~+75°C
Weight	135g