


TMPD8-10M0300-2S

10 to 3000 MHz, 2W, SMA Female
 8-WAY POWER DIVIDER

Electrical Characteristics

FREQUENCY RANGE	10~3000MHz
INSERTION LOSS	19.5dB max.
AMPLITUDE BALANCE	±0.4dB
PHASE BALANCE	±4 Deg.
VSWR(input port)	1.16 typ. & 1.2 max.
VSWR(output ports)	1.16 typ. & 1.2 max.
ISOLATION	17dB min.
IMPEDANCE	50 Ohms
POWER RATING	2W

Outline Drawing(mm[inch])

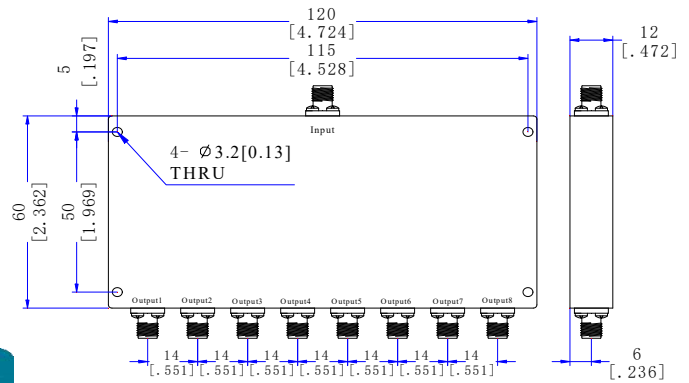

Mechanical and Environmental Characteristics

Dimensions	60×120×12mm
RF Connectors	SMA female
Surface Finishing	Black Paint
Operating Temperature	-35°C ~ +75°C
Weight	220g