


## TMPD8-00000300-2B

DC to 3000 MHz, 2W, BNC Female  
8-WAY POWER DIVIDER

### Electrical Characteristics

<b>FREQUENCY RANGE</b>	.....	DC~3000MHz
<b>INSERTION LOSS</b>	.....	20dB max.
<b>AMPLITUDE BALANCE</b>	.....	±0.5dB
<b>PHASE BALANCE</b>	.....	±5 Deg.
<b>VSWR(input port)</b>	.....	1.18 typ. & 1.25 max.
<b>VSWR(output ports)</b>	.....	1.18 typ. & 1.25 max.
<b>ISOLATION</b>	.....	17dB min.
<b>IMPEDANCE</b>	.....	50 Ohms
<b>POWER RATING</b>	.....	2W

### Outline Drawing(mm[inch])

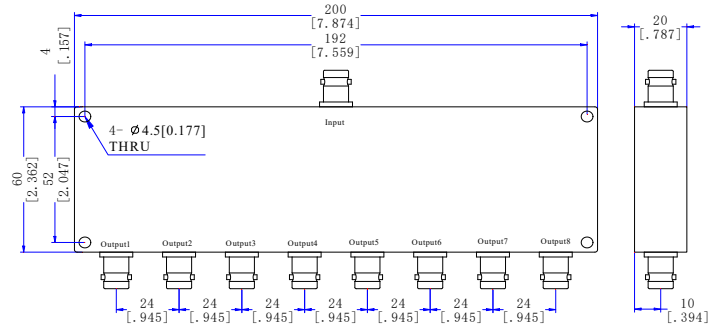

### Mechanical and Environmental Characteristics

<b>Dimensions</b>	.....	60×200×20mm
<b>RF Connectors</b>	.....	BNC female
<b>Surface Finishing</b>	.....	Sandblasted Silver
<b>Operating Temperature</b>	.....	-35℃~+75℃
<b>Weight</b>	.....	760g