


TMPD8-0000600-2S

DC to 6 GHz, 2W, SMA Female
8-WAY POWER DIVIDER

Electrical Characteristics

FREQUENCY RANGE	DC~6000MHz
INSERTION LOSS	22dB max.
AMPLITUDE BALANCE	±0.8dB
PHASE BALANCE	±5 Deg.
VSWR(input port)	1.18 typ. & 1.25 max.
VSWR(output ports)	1.18 typ. & 1.25 max.
ISOLATION	17dB min.
IMPEDANCE	50 Ohms
POWER RATING	2W

Outline Drawing(mm[inch])

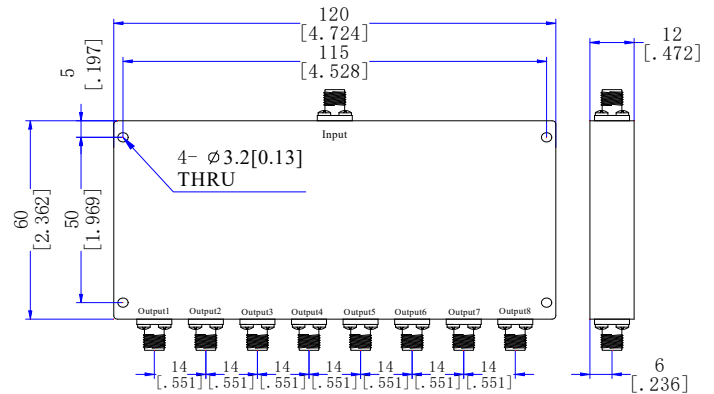

Mechanical and Environmental Characteristics

Dimensions	60×120×12mm
RF Connectors	SMA female
Surface Finishing	Black Paint
Operating Temperature	-35℃~+75℃
Weight	220g