


## TMPD8-02000400-30S 2 to 4 GHz, 30W, SMA Female 8-WAY POWER DIVIDER

### Electrical Characteristics

<b>FREQUENCY RANGE</b>	.....	2000~4000MHz
<b>INSERTION LOSS</b>	.....	1.0dB max. (excluding theoretical insertion loss 9.0dB)
<b>AMPLITUDE BALANCE</b>	.....	±0.3dB
<b>PHASE BALANCE</b>	.....	±4 Deg.
<b>VSWR(input port)</b>	.....	1.16 typ. & 1.3 max.
<b>VSWR(output ports)</b>	.....	1.14 typ. & 1.2 max.
<b>ISOLATION</b>	.....	25dB typ. & 20dB min.
<b>IMPEDANCE</b>	.....	50 Ohms
<b>POWER RATING(as a divider)</b>	...	30W
<b>POWER RATING(as a combiner)</b>	...	2W

### Outline Drawing(mm[inch])

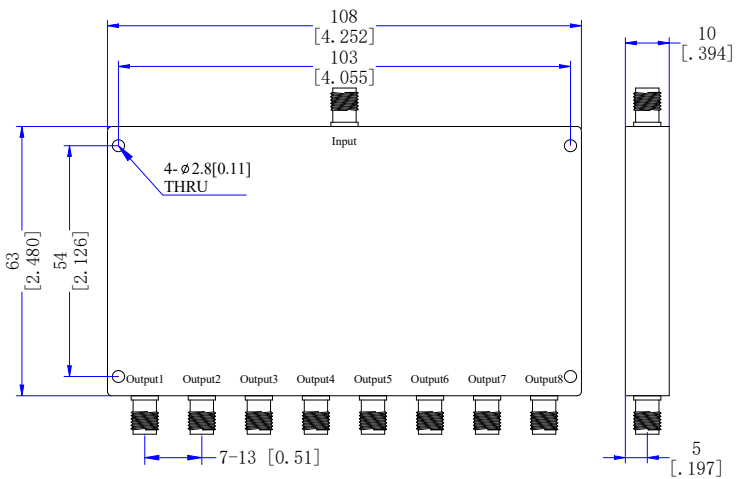

### Mechanical and Environmental Characteristics

<b>Dimensions</b>	.....	63×108×10mm
<b>RF Connectors</b>	.....	SMA female
<b>Surface Finishing</b>	.....	Black Paint
<b>Operating Temperature</b>	.....	-45°C ~ +85°C
<b>Weight</b>	.....	160g

All product specifications are subject to change without notice