


TMPD16-30M0300-2S

**30 to 3000 MHz, 2W, SMA Female
 16-WAY POWER DIVIDER**

Electrical Characteristics

FREQUENCY RANGE	30~3000MHz
INSERTION LOSS	26.5dB max.
AMPLITUDE BALANCE	±0.5dB
PHASE BALANCE	±5 Deg.
VSWR(input port)	1.18 typ. & 1.2 max.
VSWR(output ports)	1.16 typ. & 1.2 max.
ISOLATION	22dB min.
IMPEDANCE	50 Ohms
POWER RATING	2W

Outline Drawing(mm[inch])

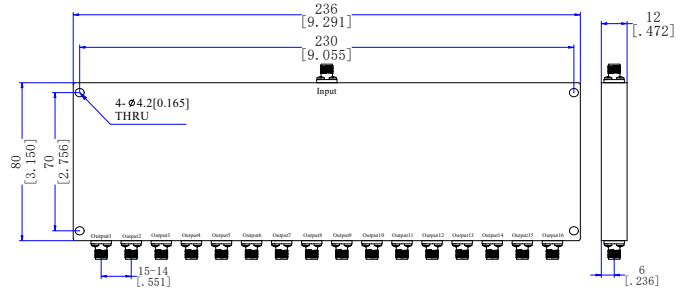

Mechanical and Environmental Characteristics

Dimensions	80×236×12mm
RF Connectors	SMA female
Surface Finishing	Black Paint
Operating Temperature	-35°C ~ +75°C
Weight	575g