


TMPD16-50M0500-2S

50 to 5000 MHz, 2W, SMA Female
16-WAY POWER DIVIDER

Electrical Characteristics

FREQUENCY RANGE	50~5000MHz
INSERTION LOSS	28dB max.
AMPLITUDE BALANCE	±0.8dB
PHASE BALANCE	±8 Deg.
VSWR(input port)	1.18 typ. & 1.25 max.
VSWR(output ports)	1.18 typ. & 1.25 max.
ISOLATION	22dB min.
IMPEDANCE	50 Ohms
POWER RATING	2W

Outline Drawing(mm[inch])

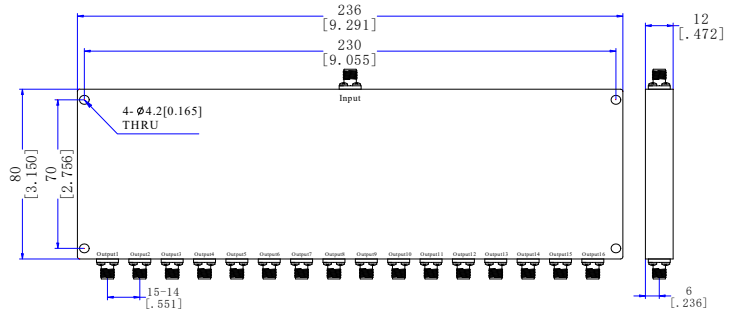

Mechanical and Environmental Characteristics

Dimensions	80×236×12mm
RF Connectors	SMA female
Surface Finishing	Black Paint
Operating Temperature	-35℃ ~ +75℃
Weight	575g