


TMPD16-00000300-2S

**DC to 3 GHz, 2W, SMA Female
 16-WAY POWER DIVIDER**

Electrical Characteristics

FREQUENCY RANGE	DC~3000MHz
INSERTION LOSS	26.5dB max.
AMPLITUDE BALANCE	±0.5dB
PHASE BALANCE	±5 Deg.
VSWR(input port)	1.18 typ. & 1.2 max.
VSWR(output ports)	1.16 typ. & 1.2 max.
ISOLATION	6dB min.
IMPEDANCE	50 Ohms
POWER RATING	2W

Outline Drawing(mm[inch])

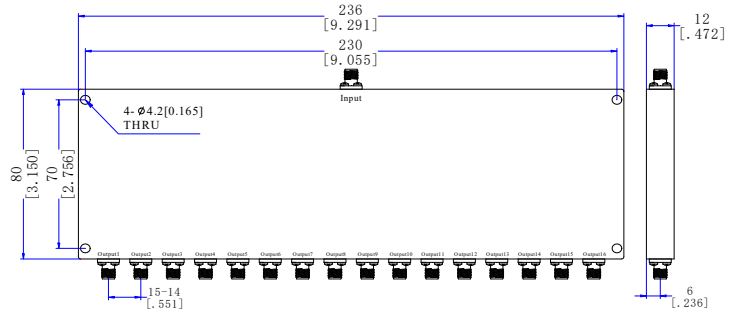

Mechanical and Environmental Characteristics

Dimensions	80×236×12mm
RF Connectors	SMA female
Surface Finishing	Black Paint
Operating Temperature	-35℃~+75℃
Weight	575g