


TMPD16-00600600-30S

0.6 to 6 GHz, 30W, SMA Female
16-WAY POWER DIVIDER

Electrical Characteristics

FREQUENCY RANGE	600~6000MHz
INSERTION LOSS	3.8dB max.
(excluding theoretical insertion loss 12.0dB)		
AMPLITUDE BALANCE	±0.4dB
PHASE BALANCE	±8 Deg.
VSWR(input port)	1.25 typ. & 1.4 max.
VSWR(output ports)	1.13 typ. & 1.3 max.
ISOLATION	28dB typ. & 18dB min.
IMPEDANCE	50 Ohms
POWER RATING(as a divider)	30W
POWER RATING(as a combiner)	2W

Outline Drawing(mm[inch])

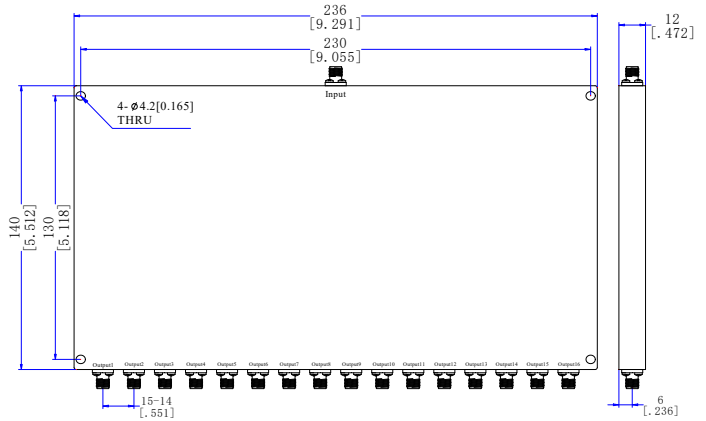

Mechanical and Enviromental Characteristics

Dimensions	140×236×12mm
RF Connectors	SMA female
Surface Finishing	Black Paint
Operating Temperature	-35°C ~ +75°C
Weight	930g