


TMPD16-00690270-30S

**0.69 to 2.7 GHz, 30W, SMA Female
 16-WAY POWER DIVIDER**

Electrical Characteristics

FREQUENCY RANGE	690~2700MHz
INSERTION LOSS	1.5dB max. (excluding theoretical insertion loss 12.0dB)
AMPLITUDE BALANCE	±0.3dB
PHASE BALANCE	±5 Deg.
VSWR(input port)	1.15 typ. & 1.3 max.
VSWR(output ports)	1.11 typ. & 1.2 max.
ISOLATION	26dB typ. & 20dB min.
IMPEDANCE	50 Ohms
POWER RATING(as a divider)	30W
POWER RATING(as a combiner)	2W

Outline Drawing(mm[inch])

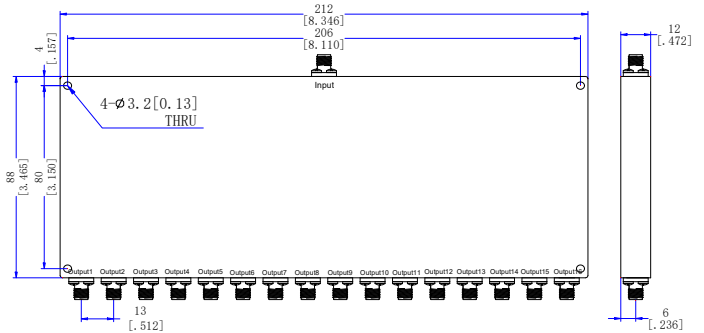

Mechanical and Enviromental Characteristics

Dimensions	88×212×12mm
RF Connectors	SMA female
Surface Finishing	Black Paint
Operating Temperature	-35°C ~ +75°C
Weight	550g