


TMPD16-08001200-20S

**8 to 12 GHz, 20W, SMA Female
 16-WAY POWER DIVIDER**

Electrical Characteristics

FREQUENCY RANGE	8000~12000MHz
INSERTION LOSS	1.6dB max.
(excluding theoretical insertion loss 12.0dB)		
AMPLITUDE BALANCE	±0.4dB
PHASE BALANCE	±5 Deg.
VSWR(input port)	1.2 typ. & 1.3 max.
VSWR(output ports)	1.18 typ. & 1.3 max.
ISOLATION	24dB typ. & 18dB min.
IMPEDANCE	50 Ohms
POWER RATING(as a divider)	20W
POWER RATING(as a combiner)	1W

Outline Drawing(mm[inch])

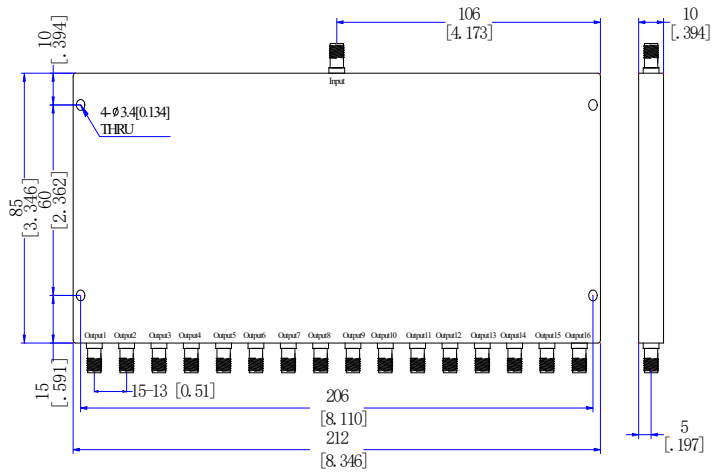

Mechanical and Environmental Characteristics

Dimensions	85×212×10mm
RF Connectors	SMA female
Surface Finishing	Black Paint
Operating Temperature	-45°C ~ +85°C
Weight	470g