TMPD32-00950195-30N

0.95 to 1.95 MHz, 30W, N Female 32-WAY POWER DIVIDER

Electrical Characteristics

FREQUENCY RANGE	950～1950MHz
INSERTION LOSS (excluding theoretical insertion loss 15.0dB)	1.8dB max.
AMPLITUDE BALANCE	±0.4dB
PHASE BALANCE	±6 Deg.
VSWR(input port)	1.22 typ. & 1.5 max.
VSWR(output ports)	1.13 typ. & 1.3 max.
ISOLATION	24dB typ. & 20dB min.
IMPEDANCE	50 Ohms
POWER RATING(as a divider)	30W
POWER RATING(as a combiner)	2W

Mechanical and Environmental Characteristics

Dimensions	130×782×20mm
RF Connectors	N female
Surface Finishing	Black Paint
Operating Temperature	-35℃ ～ +75℃
Weight	5000g

Outline Drawing(mm[inch])

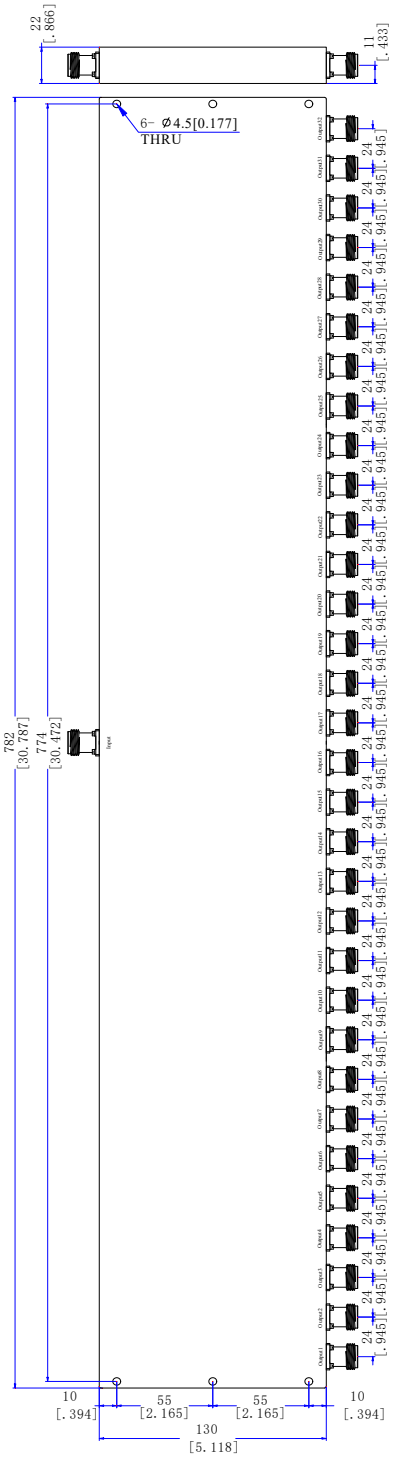

All product specifications are subject to change without notice