TMPD32-02000400-30S

2 to 4 GHz, 30W, SMA Female 32-WAY POWER DIVIDER

Electrical Characteristics

FREQUENCY RANGE	2000~4000MHz
INSERTION LOSS (excluding theoretical insertion loss 15.0dB)	2.0dB max.
AMPLITUDE BALANCE	±0.5dB
PHASE BALANCE	±8 Deg.
VSWR(input port)	1.16 typ. & 1.45 max.
VSWR(output ports)	1.14 typ. & 1.25 max.
ISOLATION	25dB typ. & 18dB min.
IMPEDANCE	50 Ohms
POWER RATING(as a divider)	30W
POWER RATING(as a combiner)	2W

Mechanical and Enviromental Characteristics

Dimensions	100×427×12mm
RF Connectors	SMA female
Surface Finishing	Sandblasted Silver
Operating Temperature	-35℃ ~ +75℃

Outline Drawing(mm[inch])

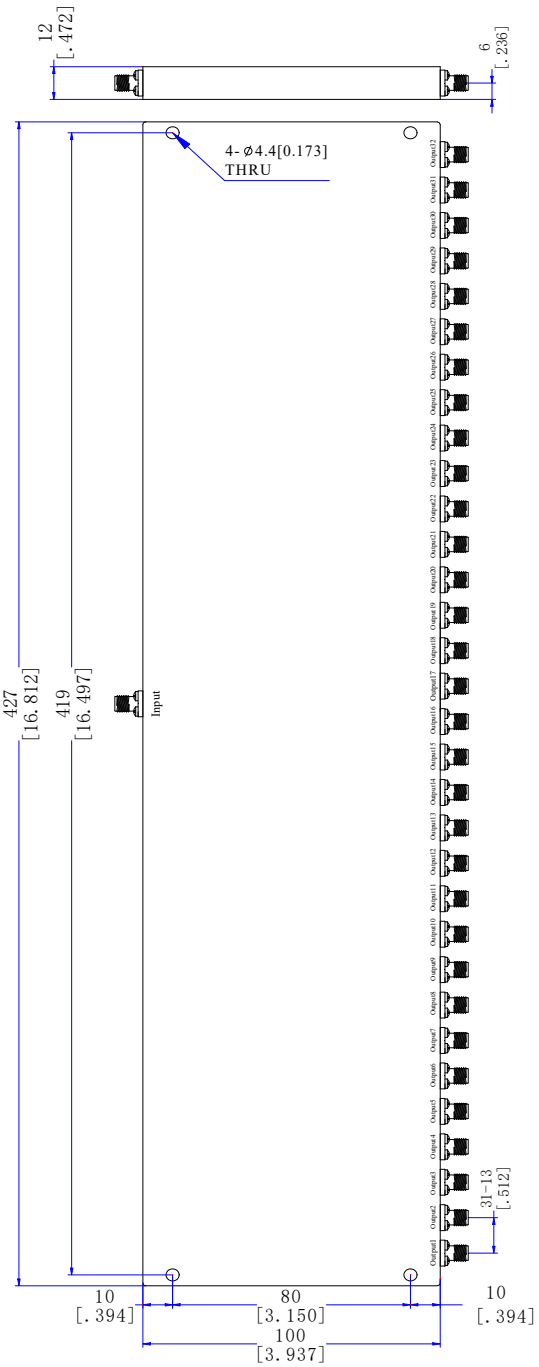

All product specifications are subject to change without notice