

**Product Features**


- Power handling up to 30W
- Wide band operation
- Functional Bandwidth : 2GHz to 8GHz
- High isolation within operational band
- Low Insertion Loss
- Stable performance over temperature
- High peak to average handling capability



**SPECIFICATIONS**

Frequency Range	2000~8000MHz
Nominal Split	3.01dB
Insertion Loss	1.6dB max.
Isolation	15dB min.
Amplitude Balance	±1.0dB max.
Phase Balance	±11 Deg. max.
VSWR	1.7 max.
Power Handling	30W
Impedance	50 Ohms
RF Connectors	SMA Female
Surface Finishing	Black Paint / Blue Paint
Operating Temp.	-45°C~ +85°C
Dimensions	82×36×11mm

**Outline Drawing(mm)**

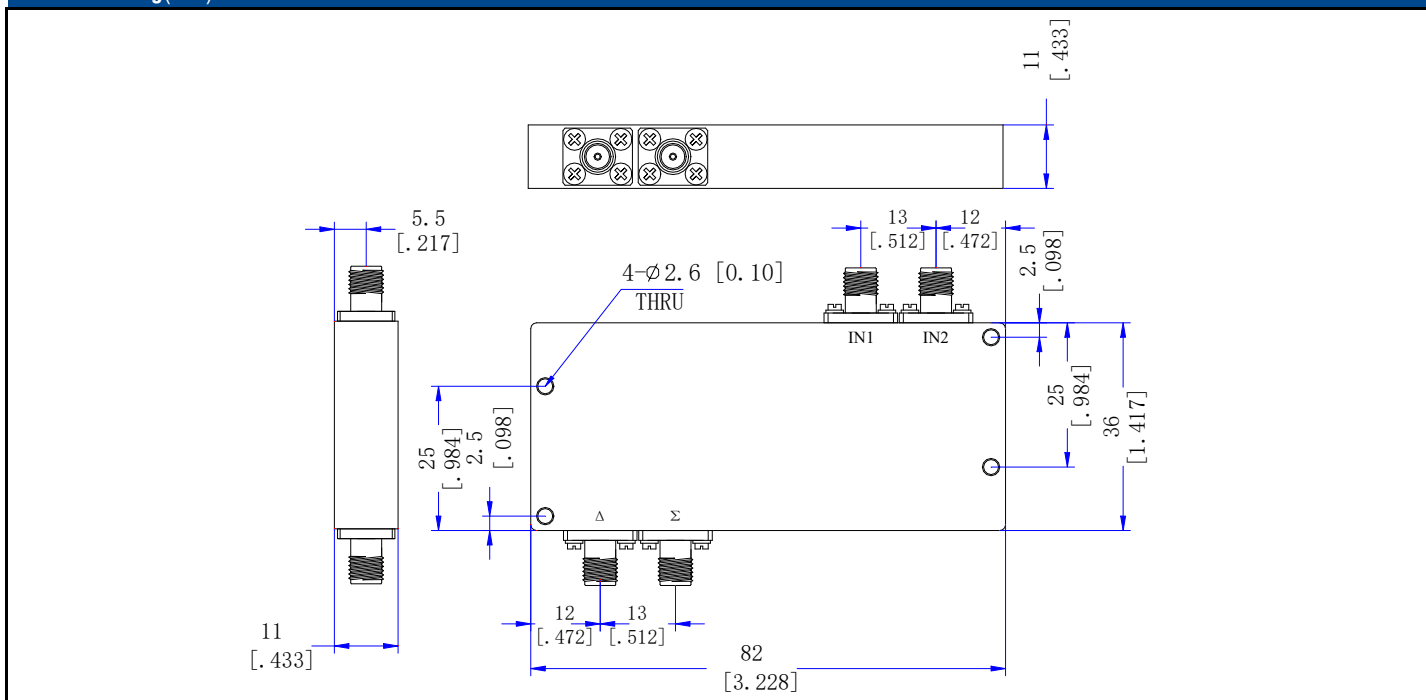

Outline Tolerances ±0.5mm (0.02inch)