
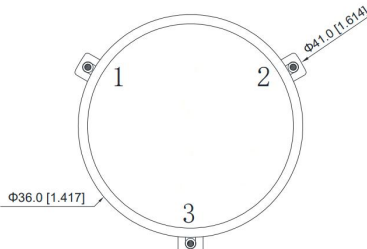


## Product Features

- High power handling up to 200W
- Low Insertion Loss
- High isolation within operational band
- Custom design available upon request
- SMT Connector type
- Operating temperature range -20°C ~ +65°C



## SPECIFICATIONS

Outline Drawing(mm[inch])	Model Number	Frequency Range (MHz)	Insertion Loss (dB. max.)	Isolation (dB. min.)	VSWR (max.)	Forward Power (W)	Reverse Power (W)
Front View 	<b>TSMC3611-1296M1298M-200</b>	1296~1298	0.2	30	1.15	200	200
	<b>TSMC3611-01100170-200</b>	1100~1700	0.5	15	1.45	200	200
	<b>TSMC3611-01000130-200</b>	1000~1300	0.4	20	1.25	200	200
Side View 	<b>TSMC3611-00900093-200</b>	900~930	0.2	30	1.15	200	200
	<b>TSMC3611-860M872M-200</b>	860~872	0.25	30	1.15	200	200
	<b>TSMC3611-00770086-200</b>	770~860	0.3	23	1.2	200	200
	<b>TSMC3611-00700100-200</b>	700~1000	0.6	16	1.4	200	200
	<b>TSMC3611-00700090-200</b>	700~900	0.4	20	1.25	200	200
	<b>TSMC3611-00600080-200</b>	600~800	0.5	19	1.25	200	200
	<b>TSMC3611-00450052-200</b>	450~520	0.4	20	1.25	200	200
	<b>TSMC3611-00440047-200</b>	440~470	0.3	23	1.2	200	200
	<b>TSMC3611-419M425M-200</b>	419~425	0.3	30	1.15	200	200
	<b>TSMC3611-413M419M-200</b>	413~419	0.3	30	1.15	200	200
	<b>TSMC3611-00400047-200</b>	400~470	0.4	20	1.25	200	200
	<b>TSMC3611-00390041-200</b>	390~410	0.3	23	1.2	200	200
<b>TSMC3611-00380046-200</b>	380~460	0.5	18	1.3	200	200	
<b>TSMC3611-00350037-200</b>	350~370	0.35	21	1.2	200	200	
<b>TSMC3611-309M339M-200</b>	309~339	0.4	20	1.25	200	200	
<b>TSMC3611-00260028-200</b>	260~280	0.5	20	1.25	200	200	
<b>TSMC3611-00240026-200</b>	240~260	0.5	18	1.3	200	200	
<b>TSMC3611-00220024-200</b>	220~240	0.65	18	1.3	200	200	

## Back View

