




Product Features


- 323 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.

Performance Chart

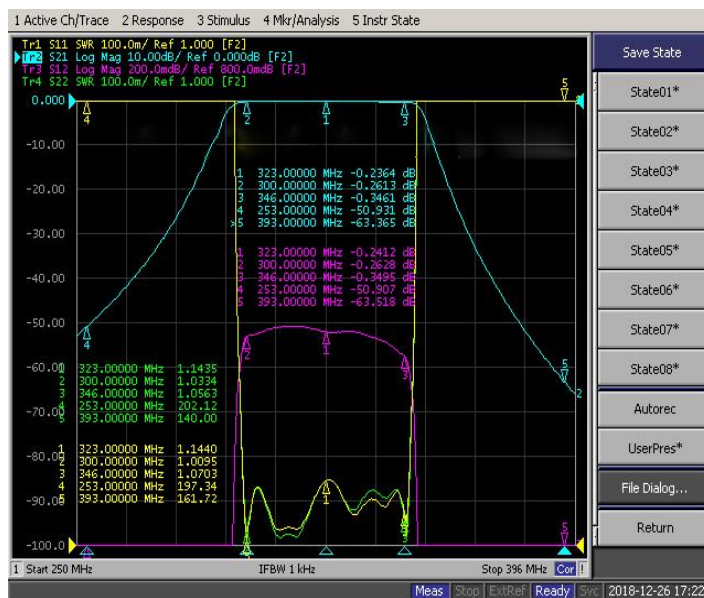

RF Characteristics	
Center Frequency[Fo]	323MHz
Operating Frequency	300~346MHz
Insertion Loss	1.0dB max.
VSWR	1.3 max.
Stopband Attenuation	40dB min@Fo±70MHz (DC~253MHz, 393~800MHz)
Impedance	50 Ohms
Power	20W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Weight	680g

Outline Drawing(mm)

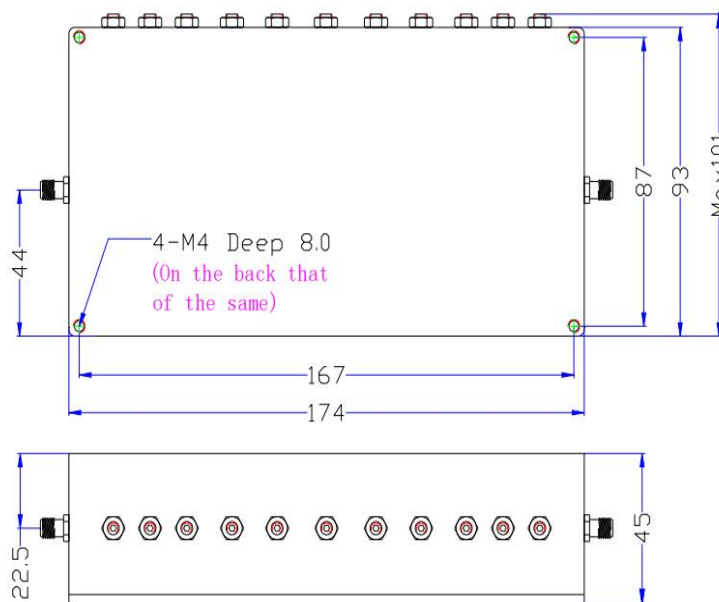

Outline Tolerances ±0.5mm (0.02inch)