




### Product Features


- 340 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.

### Performance Chart

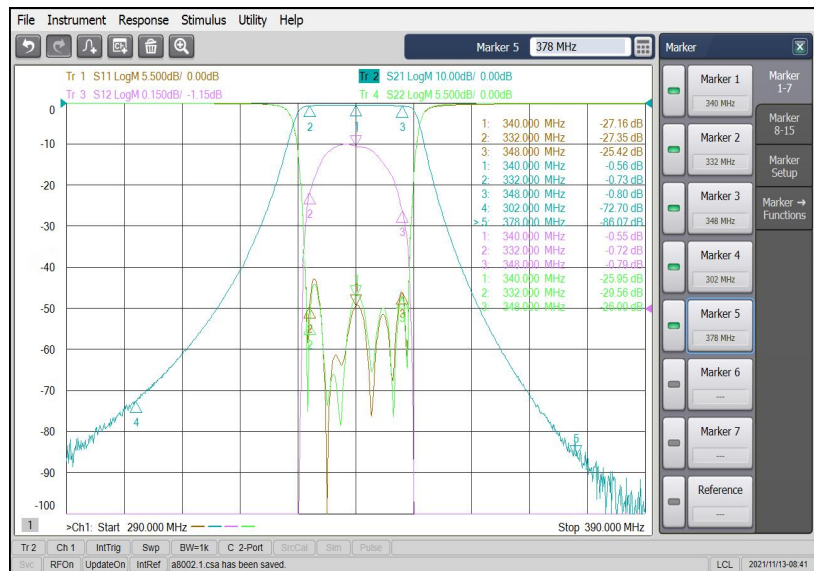

RF Characteristics	
Center Frequency[Fo]	340MHz
Operating Frequency	332~348MHz
Insertion Loss	1.0dB max.
Passband Ripple	0.3dB max.
Passband Return Loss	20dB min.
Stopband Attenuation	65dB min@DC~302MHz 75dB min@378~2200MHz
Impedance	50 Ohms
Power	20W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Weight	950g

### Outline Drawing(mm)

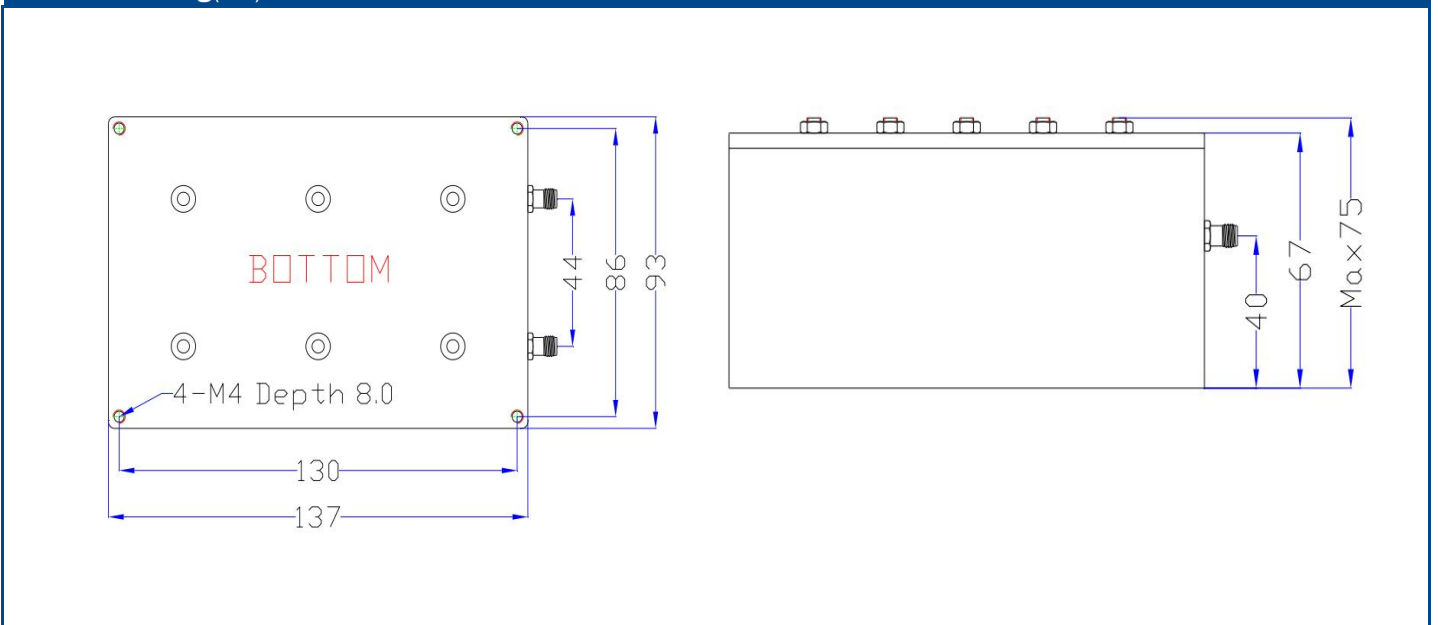

Outline Tolerances ±0.5mm (0.02inch)