




**Product Features**


- 430 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.

**Performance Chart**

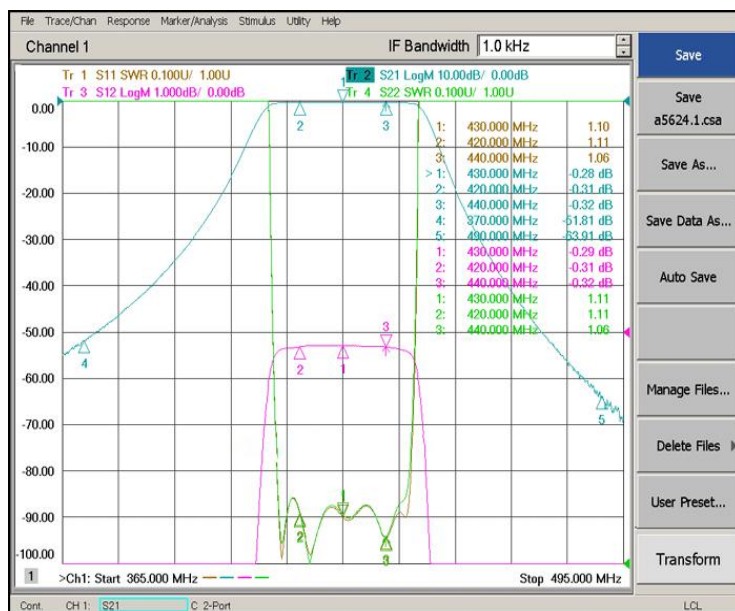

| RF Characteristics    |  |
|-----------------------|--|
| Center Frequency[Fo]  | 430MHz                                       |
| Operating Frequency   | 420~440MHz                                   |
| Insertion Loss        | 0.6dB max.                                   |
| VSWR                  | 1.3 max.                                     |
| Stopband Attenuation  | 40dB min@Fo±50MHz<br>(DC~370MHz, 490~900MHz) |
| Impedance             | 50 Ohms                                      |
| Power                 | 100W   |
| RF Connector          | SMA female                                   |
| Surface Finish        | Black Paint                                  |
| Operating Temperature | -30°C ~ +70°C                                |
| Net Wight             | 665g   |

**Outline Drawing(mm)**

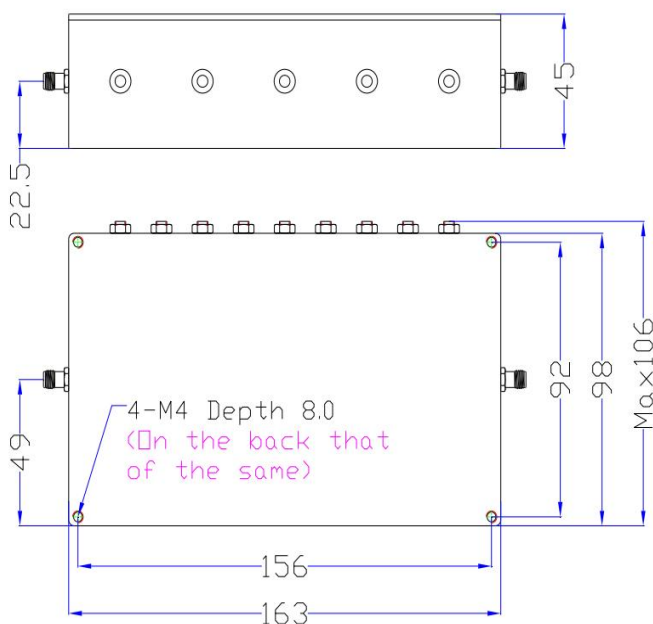

Outline Tolerances ±0.5mm (0.02inch)