




Product Features


- 440 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.

Performance Chart

RF Characteristics	
Center Frequency[Fo]	440MHz
Operating Frequency	430~450MHz
Passband Insertion Loss	1.0dB max.
Passband Ripple	0.5dB max.
Passband VSWR	1.22 max.
Stopband Attenuation	30dB min@DC~425MHz 30dB min@455~1800MHz
Impedance	50 Ohms
Power	20W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Wight	1040g

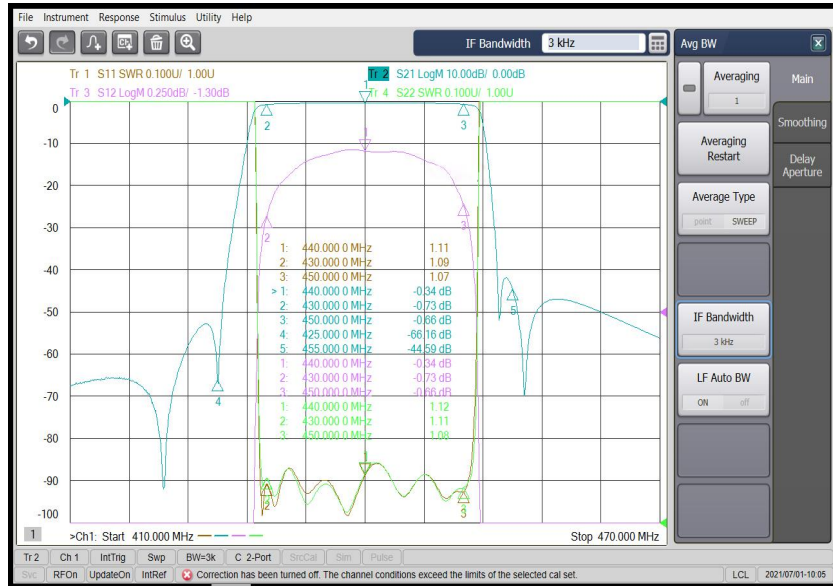

Outline Drawing(mm)

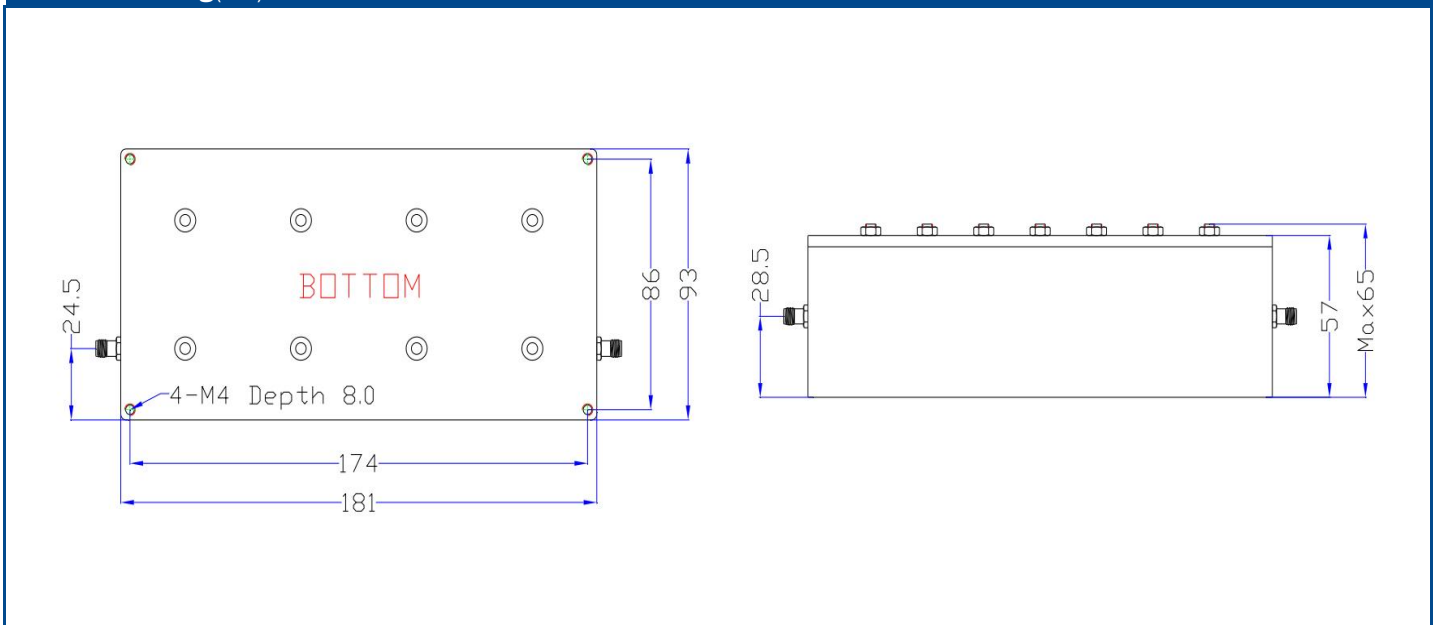

Outline Tolerances ±0.5mm (0.02inch)