




### Product Features


- 415 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.

### Performance Chart

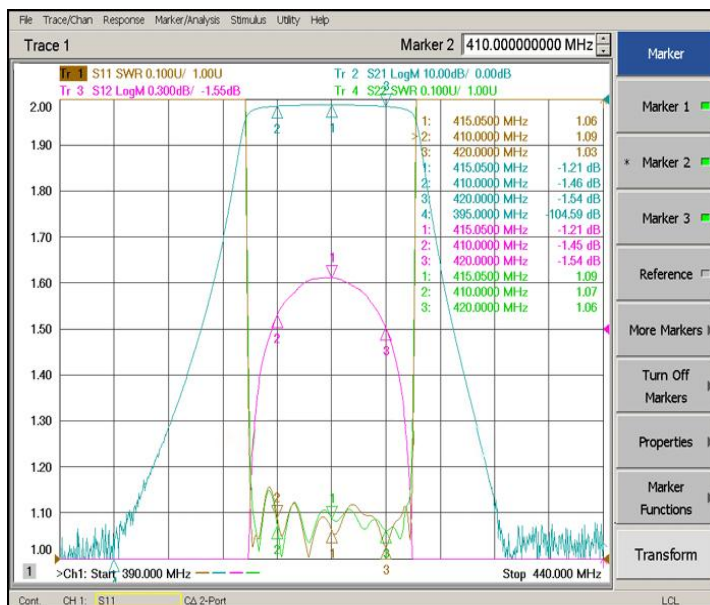

RF Characteristics	
Center Frequency[Fo]	415MHz
Operating Frequency	410~420MHz
Insertion Loss	2.0dB max.
Passband VSWR	1.3 max.
Stopband Attenuation	90dB min@DC~395MHz
Impedance	50 Ohms
Power	25W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30℃ ~ +70℃
Net Wight	1080g

### Outline Drawing(mm)

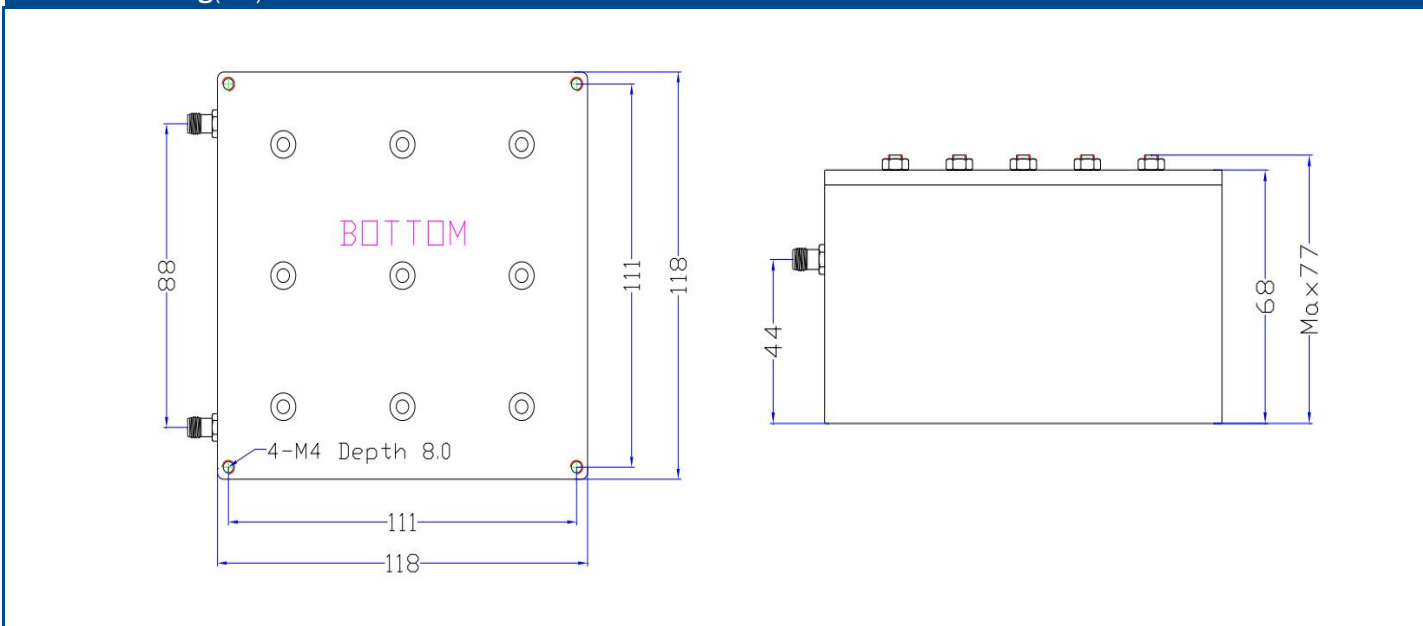

Outline Tolerances ±0.5mm (0.02inch)