



### Product Features


- 462.5 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.

### Performance Chart



RF Characteristics	
Center Frequency[Fo]	462.5MHz
Operating Frequency	437~488MHz
Passband Insertion Loss	0.5dB max.
Passband Ripple	0.2dB max.
Passband Return Loss	20dB min.
Stopband Attenuation	60dB min@DC~275MHz 70dB min@650~1500MHz
Impedance	50 Ohms
Power	50W
RF Connector	N-type female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Weight	506g

### Outline Drawing(mm)

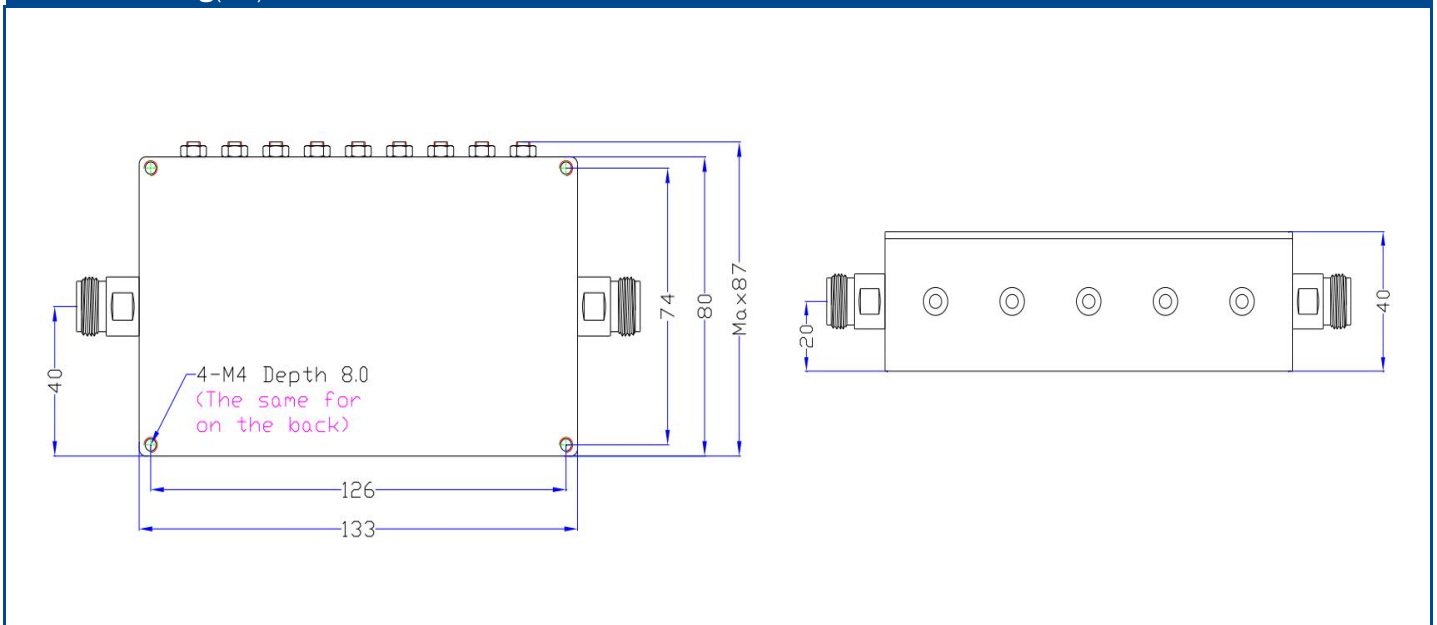

Outline Tolerances ±0.5mm (0.02inch)