




**Product Features**


- 550 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.

**Performance Chart**

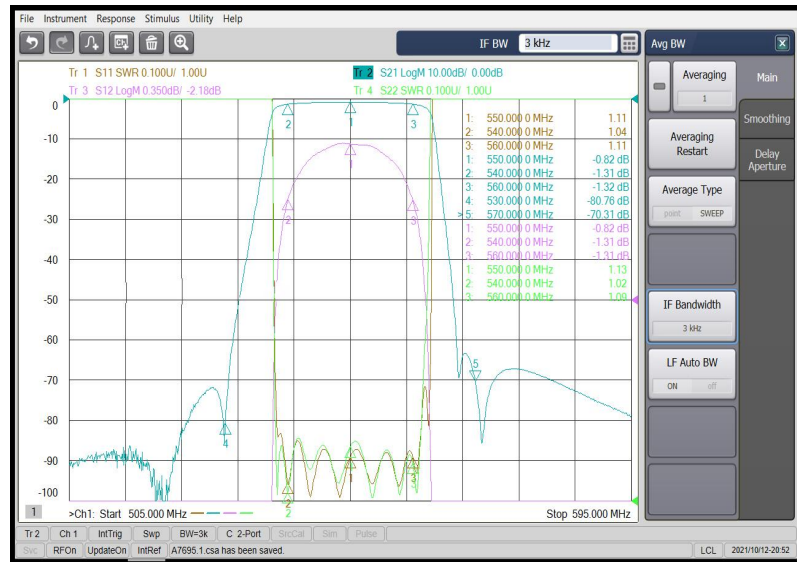

RF Characteristics	
Center Frequency[Fo]	550MHz
Operating Frequency	540~560MHz
Passband Insertion Loss	1.5dB max.
Passband Ripple	0.7dB max.
Passband VSWR	1.22 max.
Stopband Attenuation	60dB min@DC~530MHz 60dB min@570~3000MHz
Impedance	50 Ohms
Power	20W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Weight	640g

**Outline Drawing(mm)**

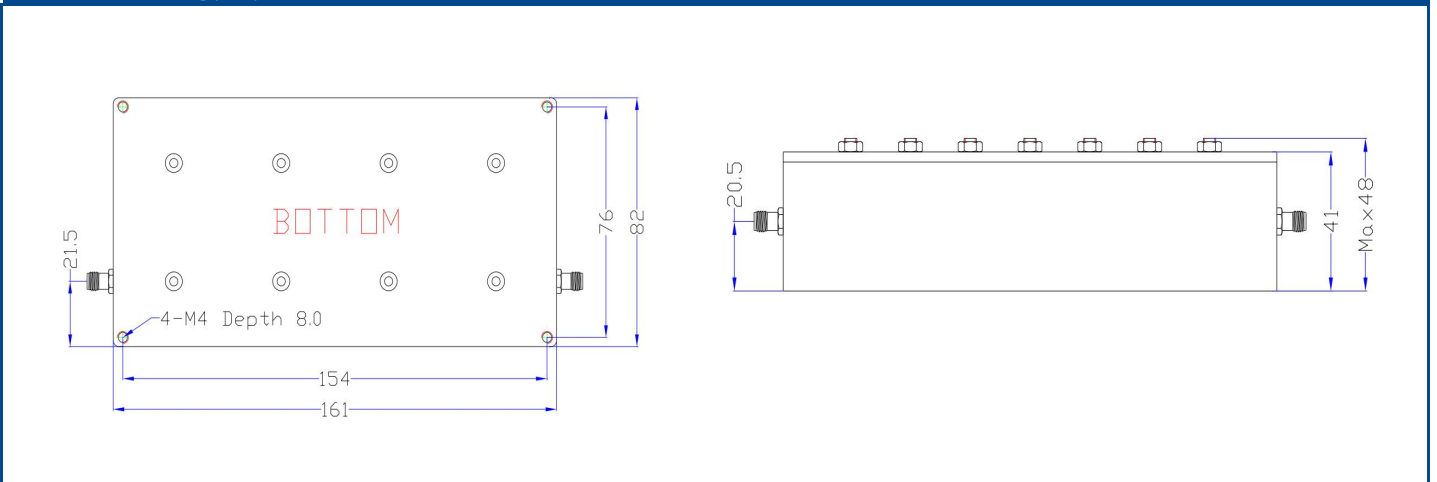

Outline Tolerances ±0.5mm (0.02inch)