




Product Features


- 816 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.

Performance Chart

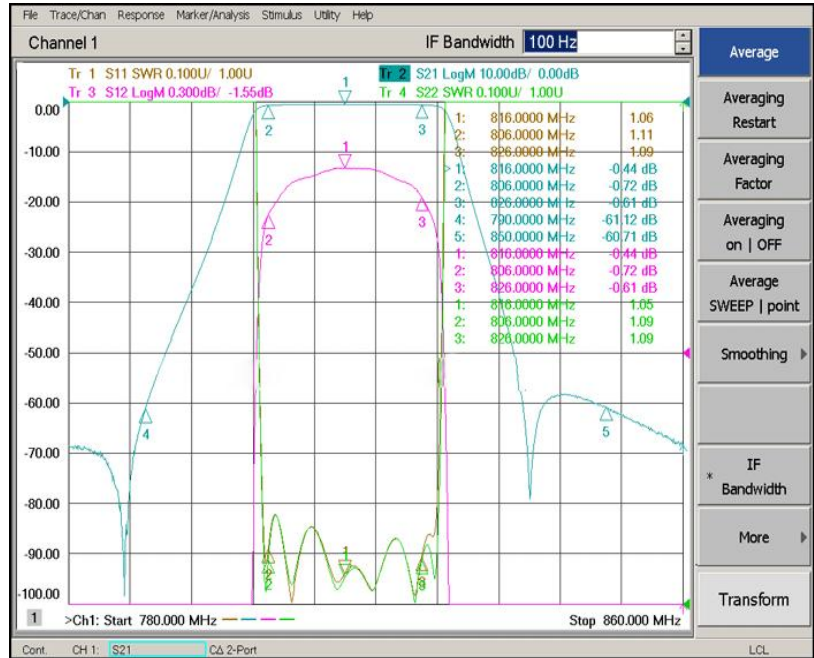

RF Characteristics	
Center Frequency[Fo]	816MHz
Operating Frequency	806~826MHz
Passband Insertion Loss	1.0dB max.
Passband VSWR	1.3 max.
Stopband Attenuation	50dB min@DC~790MHz 50dB min@850~1420MHz 70dB min@1420~2000MHz
Impedance	50 Ohms
Power	20W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-20°C ~ +60°C
Net Weight	420g

Outline Drawing(mm)

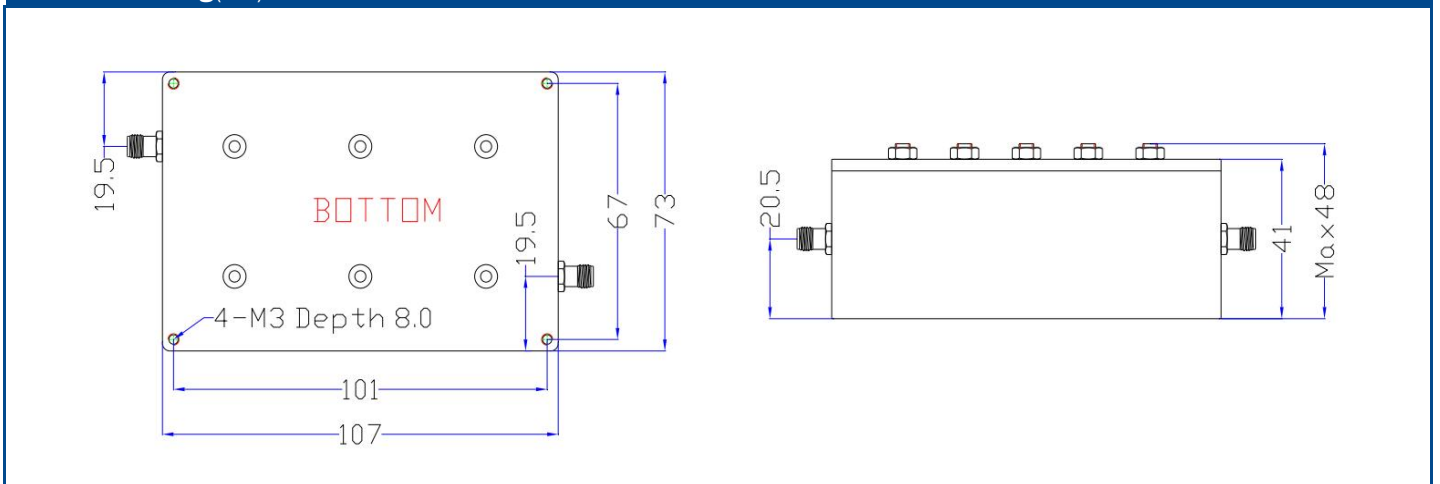

Outline Tolerances ±0.5mm (0.02inch)