




**Product Features**


- 900 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.

**Performance Chart**

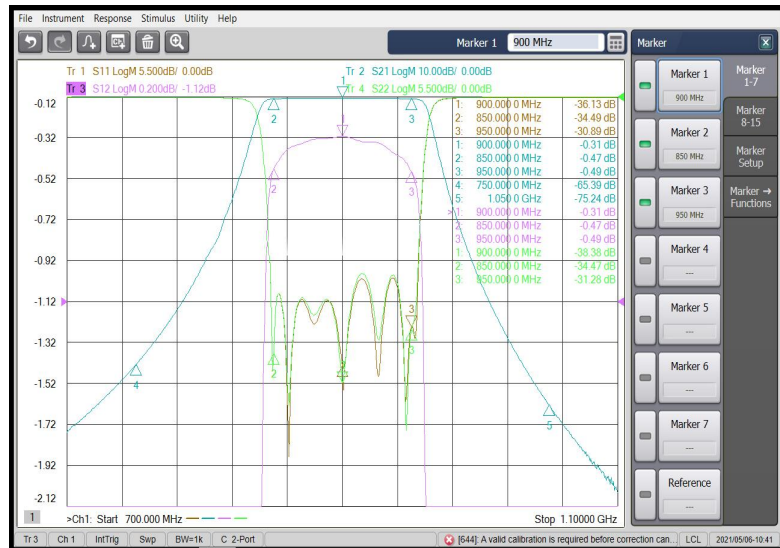

RF Characteristics	
Center Frequency[Fo]	900MHz
Operating Frequency	850~950MHz
Passband Insertion Loss	0.6dB max.
Passband Ripple	0.3dB max.
Passband Return Loss	20dB min.
Stopband Attenuation	50dB min@DC~750MHz 60dB min@1050~3800MHz
Impedance	50 Ohms
Power	10W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Weight	260g

**Outline Drawing(mm)**

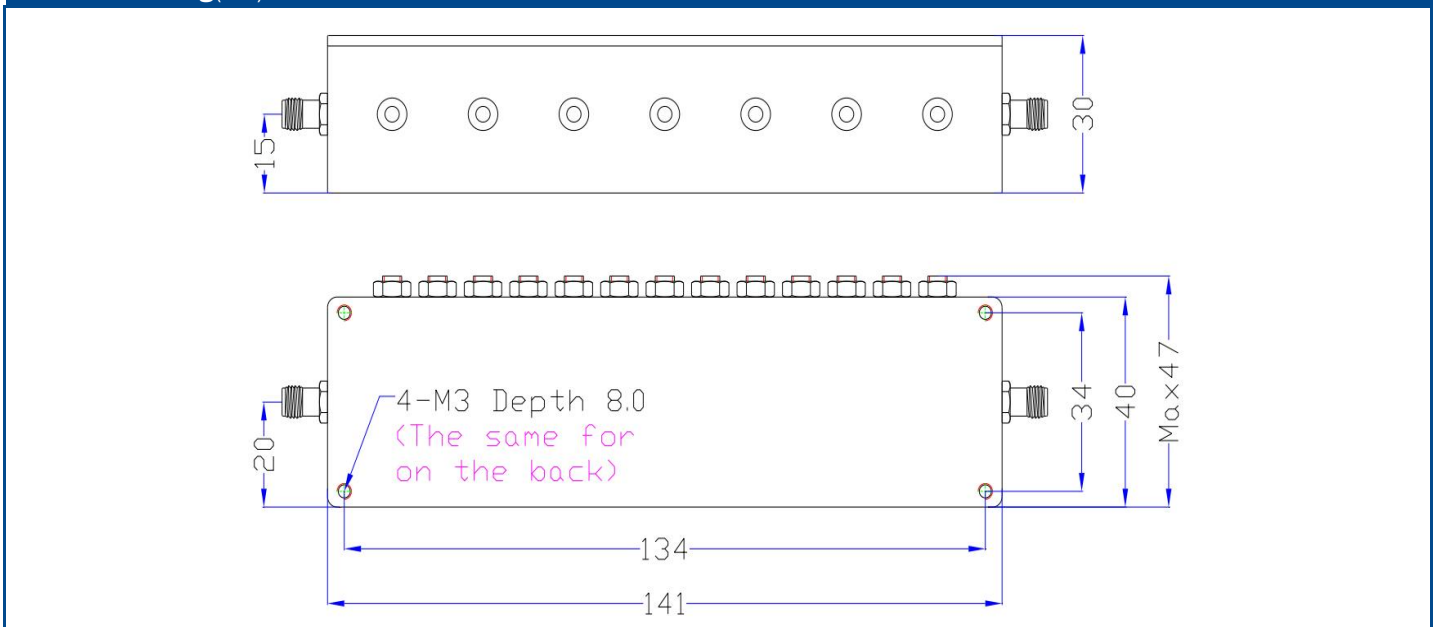

Outline Tolerances ±0.5mm (0.02inch)