




Product Features

- 897.5 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.


RF Characteristics

Center Frequency[Fo]	897.5MHz
Operating Frequency	880~915MHz
Passband Insertion Loss	1.2dB max.
Passband Ripple	0.6dB max.
Passband VSWR	1.22 max.
Stopband Attenuation	40dB min@DC~870MHz 40dB min@925~3000MHz
Impedance	50 Ohms
Power	100W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Wight	6600g

Performance Chart

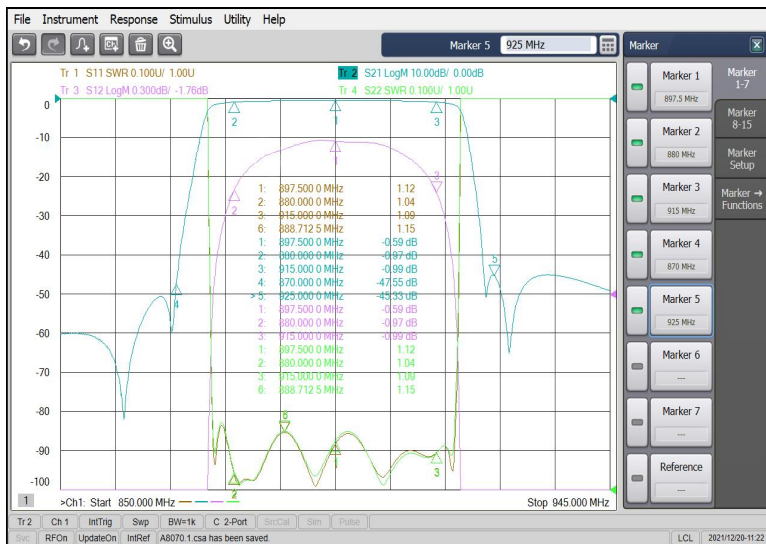

Outline Drawing(mm)

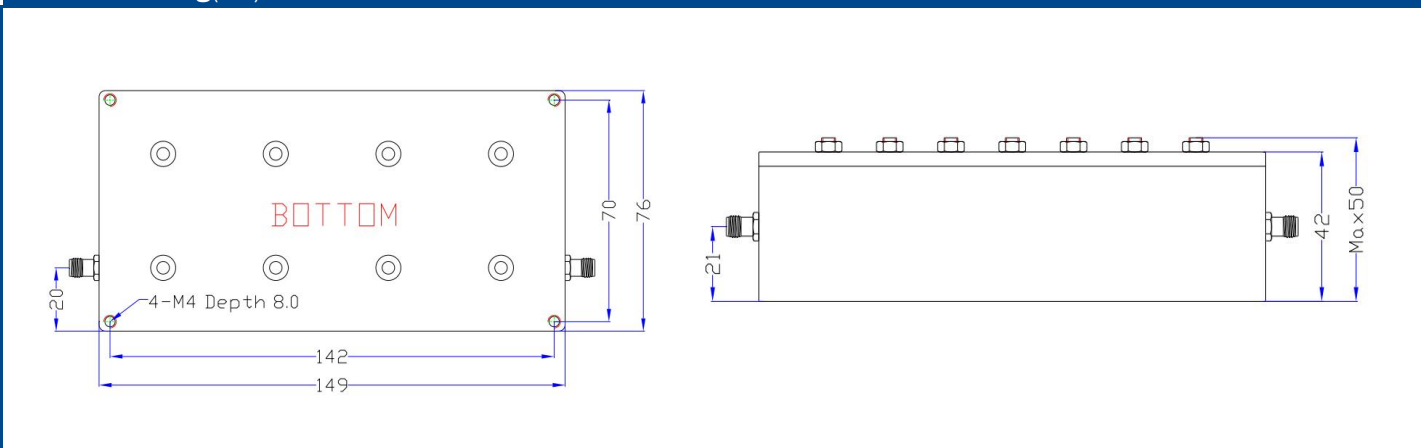

Outline Tolerances ±0.5mm (0.02inch)