




Product Features


- 897.5 MHz Bandpass Filter
- High Rejection
- Low Insertion Loss
- SMA Connector
- Other center frequencies and bandwidths are available. Please consult the factory.

Performance Chart

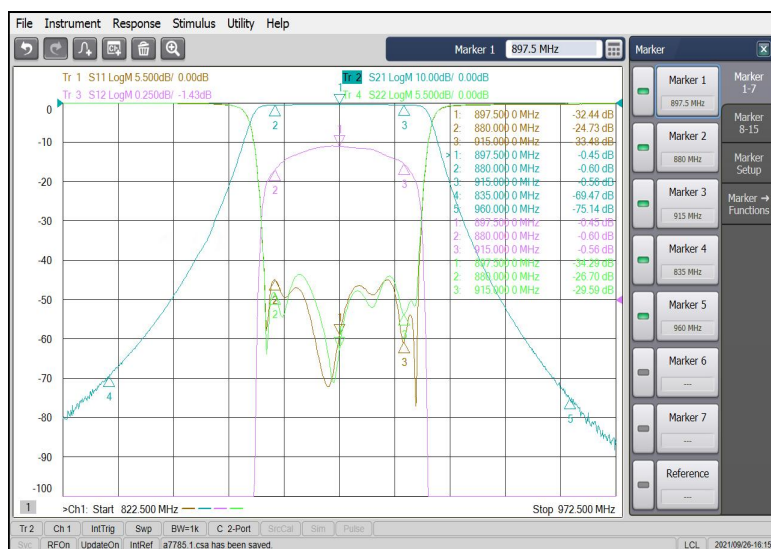

RF Characteristics	
Center Frequency[Fo]	897.5MHz
Operating Frequency	880~915MHz
Passband Insertion Loss	0.8dB max.
Passband Ripple	0.3dB max.
Passband Return Loss	20dB min.
Stopband Attenuation	60dB min@DC~835MHz 65dB min@960~3000MHz
Impedance	50 Ohms
Power	20W
RF Connector	SMA female
Surface Finish	Black Paint
Operating Temperature	-30°C ~ +70°C
Net Wight	290g

Outline Drawing(mm)

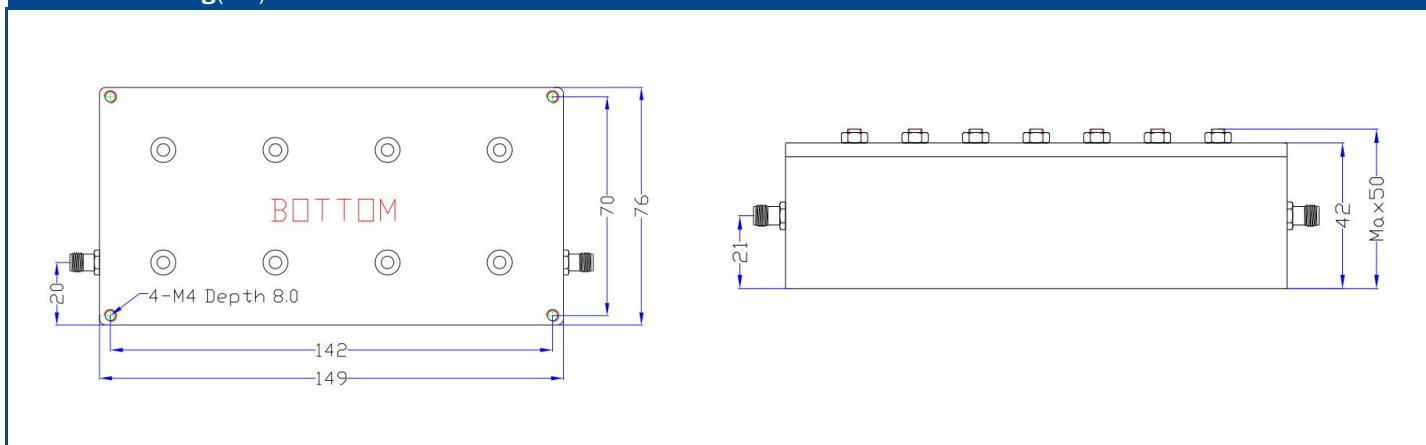

Outline Tolerances ±0.5mm (0.02inch)